

wagner

L460



Purpose-Built Log Handlers

Specifications are subject to change without notice or obligation.



MADE IN USA

L460

Capacity

Tipping Capacity.....	48" Load Center.....	70,000 lbs (31,750 kg)
Rated Capacity	48" Load Center.....	60,000 lbs (27,216 kg)
Tipping Capacity.....	60" Load Center.....	64,000 lbs (29,029 kg)
Rated Capacity	60" Load Center.....	55,000 lbs (24,947 kg)

Engine

Make and Model.....	Cummins QSM11
Max Horsepower	400 HP
<u>Optional:</u>	
Make and Model.....	Caterpillar C13
Max Horsepower	440 HP

Service Refill Capacities

Fuel Tank.....	180 Gal (681 liters)*
Hydraulic Oil	240 Gal (908 liters)*
Engine w/Filter.....	10 Gal (38 liters)*
Cooling System	13 Gal (49 liters)*

Integral Transmission/Converter w/Automatic Shifting..... 4 Speeds Fwd/Rev

Axles

Front & Rear Axle	Planetary Final Reduction
-------------------------	---------------------------

Tires

Size (Front).....	35/65 x 33 Biased Ply	Standard
Size (Rear)	23.5 x 25 Biased Ply	Standard
Size (Front).....	35/65 x R33 Radial	Optional
Size (Rear)	23.5 x 25R Radial	Optional
Dual Front Tires ..	18.00 x 33 Radial or Biased Ply.....	Optional

Cab

Best in class working environment includes the following:


Noise (dBA) Inside Cab (ISO 6396:2008).....	72 dB
Visibility.....	360°
Convex Front Windshield	Standard
Falling Objects Protection (F.O.P.) Certification.....	Standard
Heat/AC	Standard
Air Seat Suspension for Operator Comfort.....	Standard
Cab Isolation from Chassis (Noise/Vibration Reduction).....	Standard
Rotating Platform, 90°	Standard
Sliding Windows	Optional
Load Dampening	Optional
Joystick Steering	Optional

Features & Options

Wet Disc Brakes	Standard
Remote Engine Oil Drain.....	Standard
Stairwell Access.....	Standard
Central Lube	Standard
Sight Gauges.....	Standard
Service Bay	Standard
ANSUL Fire Suppression (Liquid)	Standard
Halogen Lights.....	Standard
Tilt Cab	Optional
LED Lights	Optional
Front and Rear Cameras.....	Optional
Warning Beacon	Optional
Converter Lockup	Optional

*Approximate

L460

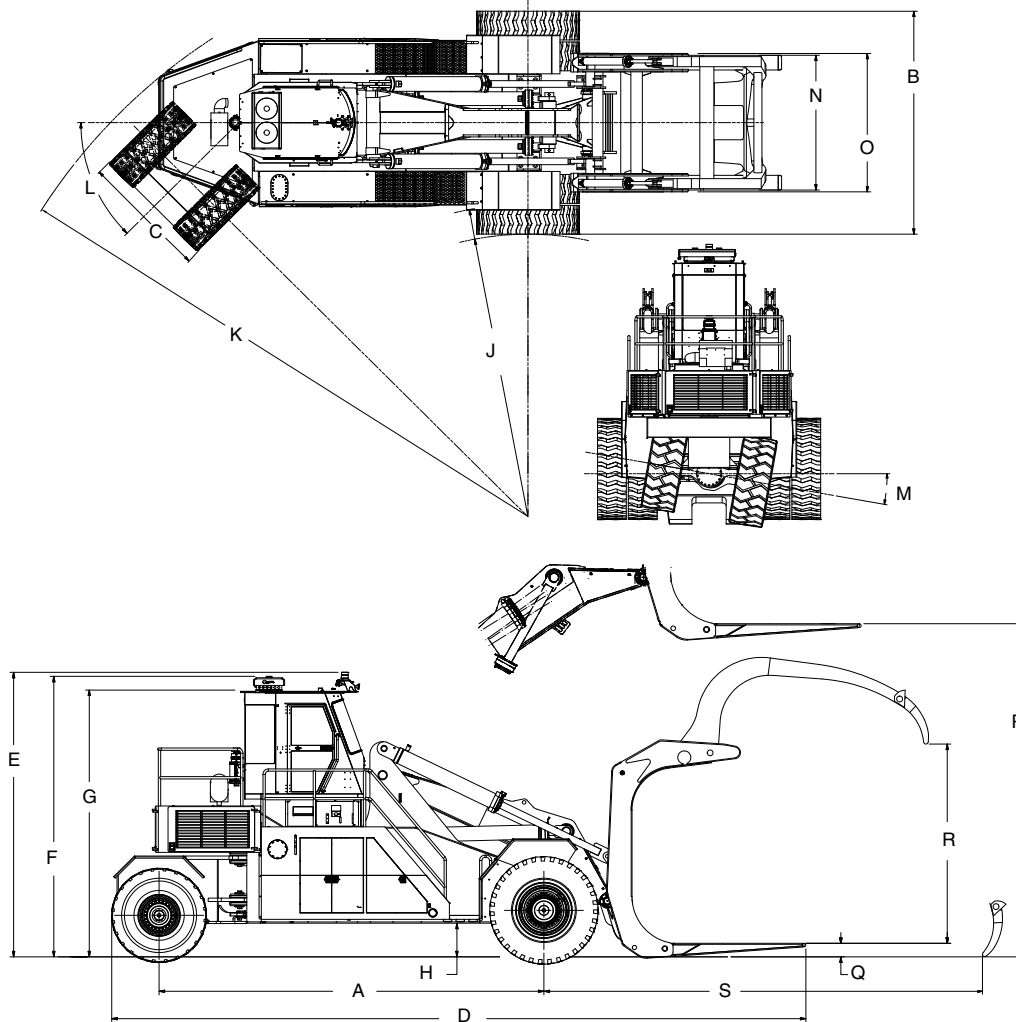

Dimensions*

	L460	L460 High Lift
A. Wheelbase	22' 8" (6,909 mm)	22' 8" (6,909 mm)
B. Width	12' 5" (3,783 mm)	12' 5" (3,783 mm)
Width (Dual Tires)	13' 11" (4,249 mm)	13' 11" (4,249 mm)
C. Width Outside of Bogie Tires	7' 9" (2,362 mm)	7' 9" (2,362 mm)
D. Length	38' 10" (11,824 mm)	38' 10" (11,824 mm)
E. Cab Height w/Strobe	16' 6" (5,038 mm)	16' 6" (5,038 mm)
F. Cab Height w/AC	16' 3" (4,965 mm)	16' 3" (4,965 mm)
G. Cab Height	15' 10" (4,831 mm)	15' 10" (4,831 mm)
H. Ground Clearance Chassis	2' 0" (610 mm)	2' 0" (610 mm)
J. Inside Turning Radius	17' 0" (5,181 mm)	17' 0" (5,181 mm)
Inside Turning Radius (Dual Tires)	17' 8" (5,381 mm)	17' 8" (5,381 mm)
K. Swing Radius	35' 9" (10,888 mm)	35' 9" (10,888 mm)
L. Steering Angle	45°	45°
M. Axle Oscillation	10°	10°
N. Width Across Tines	8' 5" (2,565 mm)	8' 5" (2,565 mm)
O. Carriage Width	8' 8" (2,635 mm)	8' 8" (2,635 mm)
P. Lift Height (Standard)	16' 0" (4,869 mm)	20' 0" (6,096 mm)
Q. Ground to Front Tip of Tine	10" (242 mm)	10" (242 mm)
R. Mouth Opening	11' 10" (3,608 mm)	11' 10" (3,608 mm)
S. Distance from Axle to Holddown Tip for Reach	23' 11" (7,277 mm)	23' 11" (7,277 mm)

Weights*


Unit Weight (Empty)	115,000 lbs (52,163 kg)
Unit Weight (Loaded)	185,000 lbs (83,914 kg)

Speed (Unladen)

1	3.5 mph (5.6 km/h)
2	7.3 mph (11.7 km/h)
3	12.2 mph (19.6 km/h)
4	22.0 mph (35.4 km/h)

Custom carriage options are also available

*Approximate

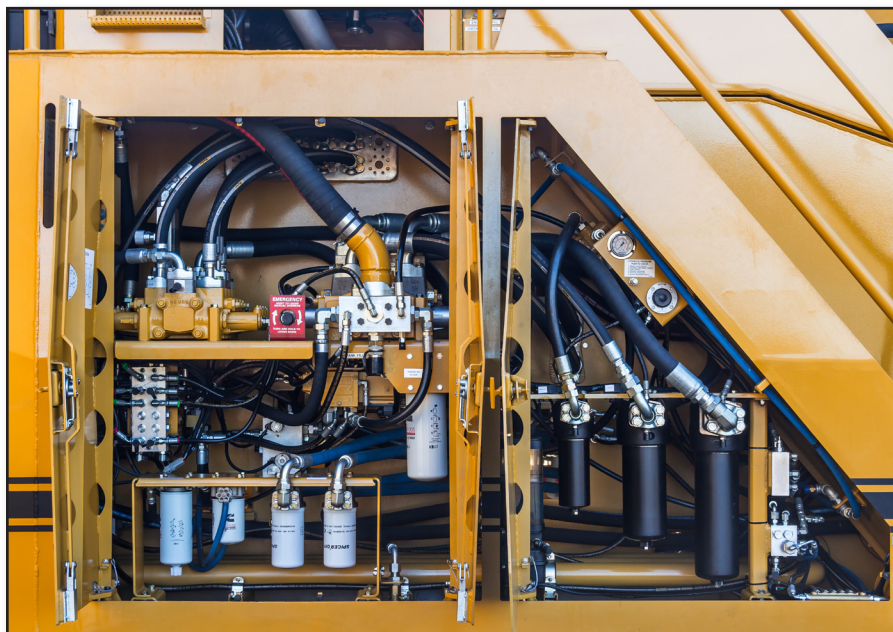

wagner

A Division of Allied Systems Company

21433 S.W. Oregon Street
Sherwood, Oregon 97140 USA
Telephone: 503.625.2560 • Fax: 503.625.7980
E-mail: wagner@alliedsystems.com
www.alliedsystems.com