
The Cat® Co.7 1500rpm engine brings you the latest technology in the mobile lighting tower market, with low emissions, reliability and improved fuel efficiency providing up to 160 hours of uninterrupted operation.

Compact and easy to transport, whilst the 4 x 300W powerful LED lamp heads offer directional clear and crisp light, with a spread of up to 100 metres, mounted on a manual tilting light bar.

Advanced Safety System fitted as standard. Fully bunded, central lifting eye, forklift pockets and accessible lashing down points for ease of loading at ground level. Zintec plated canopy to prevent rust and corrosion.



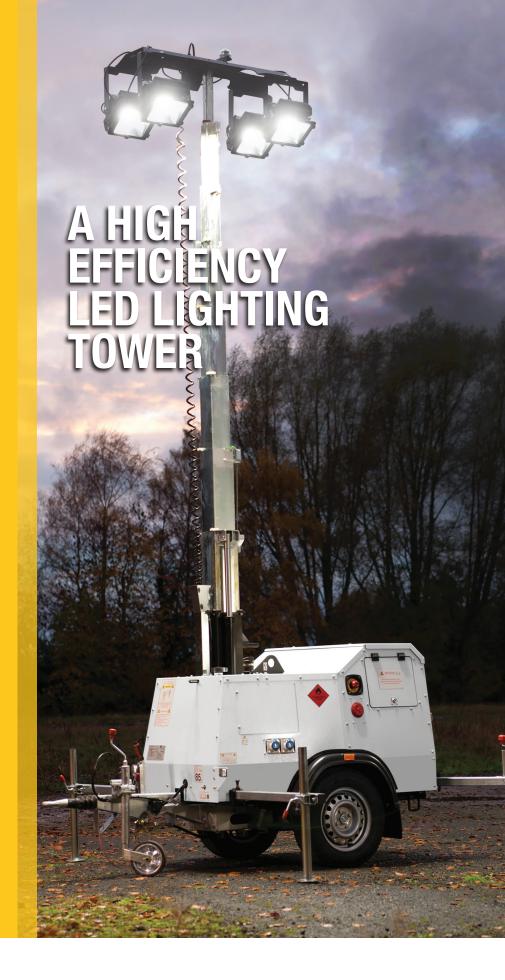

SPECIFICATION	
ENGINE TYPE	Cat C0.7 3cyl Water Cooled 5.9kW @ 1500rpm diesel
HYDRAULIC SYSTEM	Bio-degradable Oil
FUEL CONSUMPTION	0.72 l/hr (Lamps only)
RUNNING TIME	160 Hours
LAMP SPECIFICATION	4 x 300W LED
AVERAGE SOUND PRESSURE LEVEL @ 7 METRES	60dB(A)
ALTERNATOR	Mecc Alte LT3 4 Pole, 230V, 50Hz
CONTINUOUS POWER / STANDBY POWER	4.1kW / 4.5kW
POWER OUTLET SOCKETS	2 x 230Volt 16Amp
MAST MAXIMUM HEIGHT	8770mm
MAST RAISE / LOWER TIME	12 / 18 secs
WIND SPEED	Up to 100km/h
STABILISERS	4 with 2x rear wind down legs
BUNDING	Fully bunded all fluids
ROAD LIGHTS AND REFLECTORS	Standard
DIMENSIONS FOR TRANSPORT (LxWxH)	2565mm x 1350mm x 2150mm
DIMENSIONS FULLY DEPLOYED (LxWxH)	2870mm x 2639mm x 8770mm
WEIGHT FULLY FUELLED / UNFUELLED	1050kg / 933kg

Optional Specifications:

- Powertilt
- AutoStart
- Dusk 'til dawn sensor
- 110Volt sockets
- 4 wind down legs
- Petro Chemical
- 230Volt mains changeover
- Level sensor
- Audible alarm
- Heavy duty wind down legs
- Telemetry

Advanced Safety System includes:

- Automatic mast descent when handbrake is released
- Mast deployment alarm
- Emergency stop button
- Auto shut down will operate in the event of low oil pressure/high engine temperature

Features:



Super silent operation





Applications

























