

MARINE POWER SOLUTIONS

EDITION 2023

CAT[®] MEANS RELIABILITY,
INNOVATION, & EXPERT
GLOBAL SERVICE SUPPORT



CATERPILLAR[®]

CONTENTS

	Page
Marine Power Solutions	5
Energy Transition	8
Engines and Generator Sets	11
Cat® High-Speed and Medium-Speed Solutions	11
Cat Propulsion Engines	12
Cat Generator Sets and Auxiliary Engines	44
Cat Controls and Displays	78
Cat Selective Catalytic Reduction (SCR)	85
Engine Upgrades	88
Customer Value Agreements	91
Customer Value Agreements (CVAs)	92
EMD Medium-Speed and Dual Fuel Solutions	95
EMD Propulsion and Dual Fuel Engines	96
Glossary	105
Emissions Standards	106
Marine Rating Definition Propulsion Engines	110
Marine Rating Definition Generator Sets and Auxiliary Engines	113
Abbreviations	114
Global Dealer Network	115
Caterpillar Marine – Addresses	116

THE C32B—A WHOLE NEW WORLD OF POWER

THE MOST POWER AVAILABLE IN V-12
ENGINES AND MORE. MORE SPEED, LESS
NOISE AND REMARKABLE RELIABILITY—
EXPERIENCE THE DIFFERENCE.



MARINE POWER SOLUTIONS

Innovating Sustainability Benefits for Cat® Marine Product Services

Helping You Navigate the Energy Transition

Cat Marine products have high standards for quality, performance and reliability. There is an escalating need for lower-carbon intensity fuel solutions and sustainable power sources that minimize fuel usage, decrease your vessel's environmental impact and lower total cost of ownership.

That's why Caterpillar is focused on innovating methanol-powered solutions, and electric and hybrid systems for reducing CO₂ emissions. Plus, state-of-the-art supervisory controls will integrate system components for suitable performance and efficient plug-and-play simplicity.

All from one source: Caterpillar Marine.

Caterpillar Marine offers diesel solutions and is developing options like methanol, electric and hybrid to support our customers' energy transition.



Delivering Services that Extend the Value

We've also developed leading-edge services to wrap around our products, complemented by a suite of digital tools that deliver actionable insights about engine health and performance. Customer Value Agreements (CVAs), re-power solutions, emissions upgrade kits and other offerings help improve availability and uptime, lower cost and simplify ownership so you can focus on your business.

Cat Marine Power Outputs

Main Propulsion: 209 bkW (284 mhp) – 6,000 bkW (8,158 mhp)

Generator Sets: 10 ekW (10 kVA) – 5,200 ekW (6,500 kVA)

Working Together – Caterpillar and Cat Dealers on the Journey

Our teams remain committed to providing the level of performance and premium support you've come to expect from Caterpillar Marine. Regardless of where your vessel is constructed or delivered, if it's powered by traditional or alternative fuel sources and whether it's operating in fixed locations or navigating through territories around the world, expertly skilled Cat dealers are there for you. With over 80 years of experience and 500+ service locations shore-to-shore, you can count on them for engine expertise, parts availability and at-the-dock service efficiency.



Reach out to your local Cat dealer to learn more about today's power solutions, as well as our strategy to support decarbonization efforts in the marine industry.

WE HAVE WHAT TOMORROW TAKES

**CARBON REDUCTION. FUEL FLEXIBILITY.
OPERATIONAL EFFICIENCY. ELECTRIFICATION.**

Sustaining Our Efforts for a Better Tomorrow

Innovating and Integrating. Driven to help you achieve operational success.

At Caterpillar, we've been helping our customers solve big problems for nearly a century – innovating, integrating and tailoring solutions that help build a better, more sustainable world. Your needs for the energy transition are no exception. Whether you're striving to reduce environmental footprint and fuel costs, increase fuel flexibility, move toward electrification or operate more efficiently and safely, you can count on us to help you achieve your goals.

Here are three examples of how we're putting our experience to work to take on decarbonization challenges on the water:



Use lower-carbon intensity fuels today

- Biodiesel and renewable diesel up to 100% blends for select models
- Emissions upgrade solutions for existing fleets
- Methanol-ready 3500E for select ratings tomorrow



Fuel flexibility with efficiency and reliability

Current emissions regulations and future standards

- Flexible and configurable for ease of installation
- Designed to benefit uptime, time between overhauls and total cost of ownership
- Integral Caterpillar control system for simple diagnostics and service

Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.



Providing hybrid flexibility – that integrates conventional and hybrid propulsion systems

Integrated power systems

- Hybrid solutions integrate engines, generator sets and energy storage
- Intelligent controls enable seamless use of onboard power sources
- Scalable options to support a wide range of propulsion and power generation applications

We Have What Tomorrow Takes

Let's work together to advance sustainability and help you to achieve your climate-related goals. Contact us to start a deeper conversation about the challenges you're facing and the Caterpillar solutions – existing and in development – that can help you address them.


CAT® MPC 100 CONTROL SYSTEM



A WHOLE NEW WORLD OF CONTROL

- Unique redundant control solution, reducing any system downtime
- Highly adaptable to various power-train configuration
- Extremely integratable into vessel's ecosystem



Cat® High-Speed and Medium-Speed Solutions

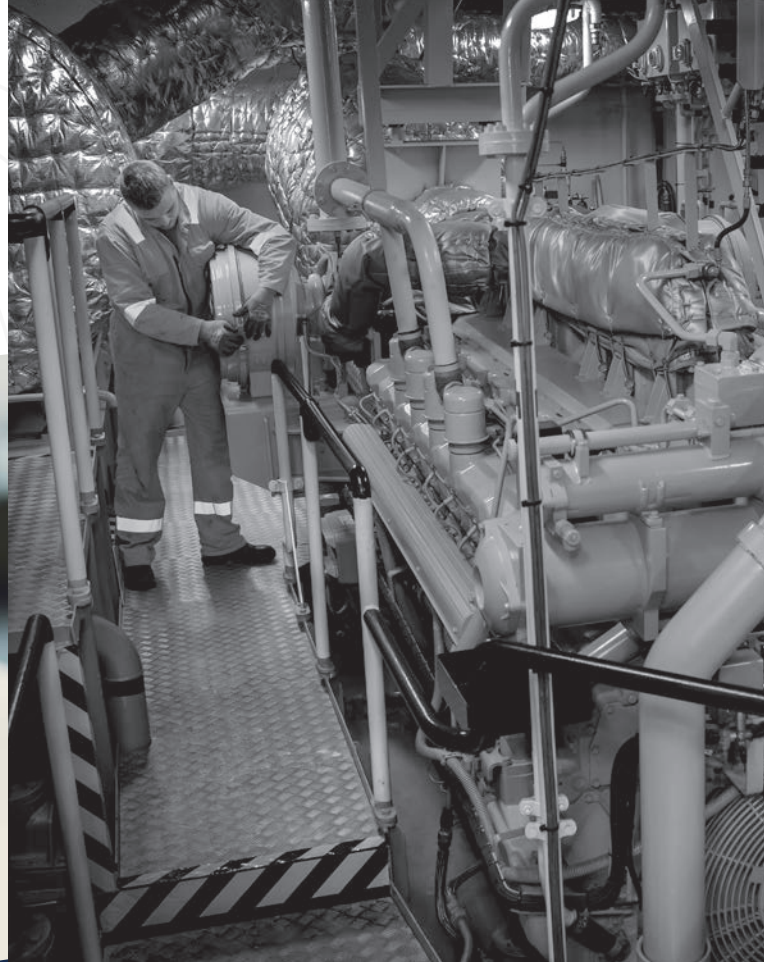



Caterpillar Marine offers a complete range of conventional and electronic propulsion solutions spanning across commercial and leisure applications. With power ranging from 209 bkW (284 mhp) to 6,500 bkW (8,834 mhp), there are Cat high-speed and medium-speed propulsion solutions for you.

Whatever the application, and whatever the solution, our products are renowned for not only reliability, durability and efficiency, but also for design and manufacturing innovation. They deliver the advanced control that vessel operators need to maximize power and efficiency, and the enhanced monitoring that ensures peace of mind.

We’re built to keep you working – or having fun – on the water.

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
E	406	400	298	2900	21.8	220.5	II	T3R	RCD	C-II
E	456	450	336	2900	24.4	219.9	II	T3R	RCD	C-II
E	507	500	373	2900	27.3	221.0	II	T3R	RCD	C-II

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.31 in	105 x 135 mm
Displacement	428 cu in	7.01 L
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	1676 lb	760 kg

DIMENSIONS

	LE	H	WE
min.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm
max.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm

C7.1

Electronic Control System

PROPULSION ENGINE (Commercial Applications)

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
B	284	280	209	2300	14.9	215.1	II	T3C	RCD	C-II
C	355	350	261	2500	18.3	211.5	II	T3C	RCD	C-II
D	406	400	298	2600	20.3	206.1	II	T3C	RCD	C-II
D	431	425	317	2700	22.9	215.6	II	T3C	RCD	C-II

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.31 in	105 x 135 mm
Displacement	428 cu in	7.01 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	1676 lb	760 kg

DIMENSIONS

	LE	H	WE
min.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm
max.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm

C9.3

Electronic Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
B	381	375	280	1800	18.7	214.9	II	T3C	RCD	C-II
C	421	416	310	2100	21.2	216.2	II	T3C	RCD	C-II
D	483	476	355	2300	24.1	218.1	II	T3C	RCD	C-II

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.53 x 5.87 in	115 x 149 mm
Displacement	568 cu in	9.3 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	2083 - 2474 lb	945 - 1122 kg

DIMENSIONS

	LE	H	WE
min.	57.2 in/1452 mm	43.0 in/1093 mm	38.5 in/978 mm
max.	57.2 in/1452 mm	43.0 in/1093 mm	38.5 in/978 mm

C12

Electronic Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	345	340	254	1800	16.1	204.4	II	NC	NC	NC
B	390	385	287	1800	18.0	201.9	II	NC	NC	NC
C	460	454	339	2100	21.3	202.2	II	NC	NC	NC
C	497	490	366	2300	23.3	205	I	NC	NC	NC
D	578	570	425	2300	27.1	204.9	I	NC	NC	NC
E	609	600	448	2300	28.4	204	I	NC	NC	NC
E	669	660	492	2300	33.0	215.6	II	NC	NC	NC
E	715	705	526	2300	35.0	214	II	NC	NC	NC

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	5.1 x 5.9 in	130 x 150 mm
Displacement	732 cu in	12 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	2588 lb	1174 kg

DIMENSIONS

	LE	H	WE
min.	62.0 in/1574 mm	39.5 in/1005 mm	38.1 in/969 mm
max.	62.0 in/1574 mm	39.5 in/1005 mm	38.1 in/969 mm

3406C

Mechanical Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	370	365	272	1800	17.2	203.2	NC	NC	NC	NC
B	406	400	298	1800	18.9	204	NC	NC	NC	NC

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	5.4 x 6.5 in	137.2 x 165.1 mm
Displacement	891 cu in	14.6 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	2921 lb	1325 kg

DIMENSIONS

	LE	H	WE
min.	57.3 in/1454.2 mm	50.3 in/1278.5 mm	36.0 in/913.5 mm
max.	57.3 in/1454.2 mm	50.3 in/1278.5 mm	36.0 in/913.5 mm

RATINGS AND FUEL CONSUMPTION

IMO II

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	460	454	339	1800	21.9	208	II	NC	NC	NC
A	485	479	357	1800	23	207.3	II	NC	NC	NC
A	608	600	447	1800	29.1	209.1	II	NC	NC	NC
B	560	553	412	2100	27.8	217.1	II	NC	NC	NC
B	680	670	500	2100	34.1	219.6	II	NC	NC	NC
C	725	715	533	2100	36.4	219.6	II	NC	NC	NC
D²	885	873	651	2200	43.7	216	II	NC	NC	NC

IMO II and U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	475	469	350	1800	23.1	212.3	II	T3C	RCD	C-II
A	608	600	447	1800	29.2	210.2	II	T3C	RCD	C-II
B¹	680	670	500	1800-2100	33.6	216.1	II	T3C	RCD	C-II
C¹	725	715	533	1800-2100	36	217.5	II	T3C	RCD	C-II
D	814	803	599	2100	41.1	220.8	II	T3C	RCD	C-II

¹ Wide Operating Speed Range (WOSR)
Heat Exchanger (32° C Sea Water Temp), Keel Cooled (52° C SCAC Temp)
² Sea Water Aftercooled

(continued)

(continued)

EU Stage V

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	591	583	435	1800	29.0	214.5	NC	NC	EUV	NC
B¹	680	670	500	1800-2100	34.1	219.7	NC	NC	EUV	NC
D	814	803	599	2100	40.8	223.3	NC	NC	EUV	NC

¹ Wide Operating Speed Range (WOSR)
Heat Exchanger (32°C Sea Water Temp), Keel Cooled (52°C SCAC Temp)

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA, TTA	
Bore x Stroke	5.7 x 7.2 in	145 x 183 mm
Displacement	1106 cu in	18.1 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	4000 - 4299 lb	1814 - 1950 kg

DIMENSIONS

	LE	H	WE
min.	73.0 in/1854 mm	47.2 in/1198 mm	44.6 in/1134 mm
max.	76.0 in/1931 mm	51.2 in/1300 mm	47.4 in/1204 mm

C18

Electronic Control System

PROPULSION ENGINE (High Performance Applications)

RATINGS AND FUEL CONSUMPTION

IMO II and U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
E	1015	1001	747	2300	52.1	224.5	II	T3R	RCD	C-II
E	1150	1136	847	2300	56.5	214.5	II	T3R	RCD	NC

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA, TTA	
Bore x Stroke	5.7 x 7.2 in	145 x 183 mm
Displacement	1106 cu in	18.1 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	4000 - 4299 lb	1814 - 1950 kg

DIMENSIONS

	LE	H	WE
min.	73.0 in/1854 mm	47.2 in/1198 mm	44.6 in/1134 mm
max.	76.0 in/1931 mm	51.2 in/1300 mm	47.4 in/1204 mm

C32

Electronic Control System

PROPULSION ENGINE (Commercial Applications)

RATINGS AND FUEL CONSUMPTION

IMO II/IMO III

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A ¹	669	660	492	1600-1800	31.3	204.4	II	NC	NC	NC*
A ¹	760	750	559	1600-1800	35.1	201.9	II	NC	NC	NC*
A ¹	760	750	559	1600-1800	36.3	209.1	II/III	NC	NC	NC
A ¹	862	850	634	1600-1800	39.7	201.4	II	NC	NC	NC*
A	964	950	709	1600	43.8	198.8	II	NC	NC	NC*
A ¹	1014	1000	746	1600-1800	46.6	201.0	II	NC	NC	NC*
A ¹	1014	1000	746	1600-1800	48.2	208.1	II/III	NC	NC	NC
B ¹	1217	1200	895	1800-2000	57.4	206.5	II	NC	NC	NC*
B ¹	1217	1200	895	1800-2000	57.4	206.5	II/III	NC	NC	NC
B	1319	1300	970	2100	62.5	207.2	II	NC	NC	NC*
B	1319	1300	970	2100	62.5	207.2	II/III	NC	NC	NC
C	1319	1300	970	1800	60.5	200.7	II	NC	NC	NC*
C	1319	1300	970	1800	60.5	200.7	II/III	NC	NC	NC
C	1319	1300	970	1800-2100	65.9	218.5	II	NC	NC	NC*
C ¹	1470	1450	1081	2000-2300	74.8	222.5	II	NC	NC	NC*
C ¹	1470	1450	1081	2000-2300	74.8	222.5	II/III	NC	NC	NC
D ^{1,2}	1622	1600	1193	2000-2300	79.4	214.0	II	NC	NC	NC*

¹ Wide Operating Speed Range (WOSR)
Heat Exchanger (32°C Sea Water Temp), Keel Cooled (52°C SCAC Temp)
² Sea Water Aftercooled
* China II certification to be available mid-2023.
Contact your local dealer for availability.

(continued)

(continued) RATINGS AND FUEL CONSUMPTION

IMO II and U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A'	760	750	559	1600-1800	36.3	209.1	II	T3C	NC	C-II*
A'	811	800	597	1600-1800	39.1	210.5	II	T3C	NC	C-II*

* China II certification expected mid-2023.
Check with your local dealer for availability.

IMO III, U.S. EPA Tier 4 Final and EU Stage V

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	1014	1000	746	1600-1800	48.0	207.2	III	T4C	EUV	NC
A'	1014	1000	746	1600-1800	48.0	206.9	III	T4C	EUV	NC
B	1217	1200	895	1800-2100	57.9	208.1	III	T4C	EUV	NC
B'	1217	1200	895	1800-2100	57.3	205.8	III	T4C	EUV	NC
C	1319	1300	970	1800-2100	63.3	210.1	III	T4C	EUV	NC
C'	1319	1300	970	1800-2100	62.3	206.6	III	T4C	EUV	NC
C'	1470	1450	1081	2050-2150	71.1	211.5	III	T4C	NC	NC

¹ Wide Operating Speed Range (WOSR)
Heat Exchanger (32°C Sea Water Temp), Keel Cooled (52°C SCAC Temp)

(continued)

(continued) SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	5.71 x 6.38 in	145 x 162 mm
Displacement	1659 cu in	32.1 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	6950 - 7160 lb	3152 - 3248 kg

DIMENSIONS

	LE	H	WE
min.	83.5 in/2121 mm	60.9 in/1547 mm	60.17 in/1528 mm
max.	89.9 in/2284 mm	62.5 in/1587 mm	60.17 in/1528 mm

RATINGS AND FUEL CONSUMPTION

IMO II/III and U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
D	1622	1600	1193	2300	83.5	225.3	II	T3R	RCD	C-II
D	1622	1600	1193	2300	83.5	225.3	II/III	NC	NC	NC
E	1724	1700	1268	2300	88.2	224	II	T3R	RCD	C-II
E	1825	1800	1342	2300	92.3	221.4	II	T3R	RCD	C-II
E	1925	1900	1418	2300	97.7	221.8	II	T3R	RCD	C-II

China II certification expected mid-2023. Contact your local dealer for availability.

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	5.71 x 6.38 in	145 x 162 mm
Displacement	1959 cu in	32.1 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	6780 lb	3075 kg

DIMENSIONS

	LE	H	WE
min.	82.9 in/2106 mm	56.9 in/1445 mm	58.3 in/1482 mm
max.	82.9 in/2106 mm	56.9 in/1445 mm	58.3 in/1482 mm

RATINGS AND FUEL CONSUMPTION

IMO II/III sand U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
E	2025	2000	1491	2300	105.0	226.4	II	T3R	RCD	C-II

China II certification expected mid-2023. Contact your local dealer for availability.

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TA	TA
Bore x Stroke	5.71 x 6.38 in	145 x 162 mm
Displacement	1959 cu in	32.1 liter
Rotation (from flywheel end)	CCW	CCW
Engine dry weight (approx)	6934 lb	3145 kg

DIMENSIONS

	LE	H	WE
min.	82.9 in/2106 mm	59.9 in/1445 mm	57.8 in/1469 mm
max.	82.9 in/2106 mm	59.9 in/1445 mm	57.8 in/1469 mm

C32B

Electronic Control System

PROPULSION ENGINE (High Performance Applications)

RATINGS AND FUEL CONSUMPTION

IMO II/III and U.S. EPA Tier 3

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
D	1825	1800	1342	2300	93.5	224.5	II/III	T3R	RCD	C-II
D	2025	2000	1491	2300	104	223.5	II/III	T3R	RCD	C-II
E	2230	2200	1641	2300	114	223.1	II/III	T3R	RCD	C-II
E	2433	2400	1790	2300	123	220.5	II/III	T3R	RCD	C-II

China II certification expected mid-2023. Contact your local dealer for availability.

IMO II Only*

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
D	1825	1800	1342	2300	90.0	216	II	–	–	–
D	2025	2000	1491	2300	100	216.1	II	–	–	–
E	2230	2200	1641	2300	114	223.1	II	–	–	–
E	2433	2400	1790	2300	123	220.5	II	–	–	–

*Up to 10% lower fuel consumption at part load & cruising speed vs. EPA Tier3

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	5.71 x 6.38 in	145 x 162 mm
Displacement	1959 cu in	32.1 liter
Rotation (from flywheel end)	CCW	
Engine dry weight (approx)	7736 lb	3509 kg

DIMENSIONS

	LE	H	WE
min.	87.8 in/2231 mm	58.1 in/1478 mm	58.0 in/1474 mm
max.	87.8 in/2231 mm	58.1 in/1478 mm	58.0 in/1474 mm

3512C

Electronic Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	1298	1280	954	1600	59.4	200.1	II	NC	NC	NC
A	1318	1300	969	1200	62.3	206.6	II	NC	NC	NC
A	1420	1400	1044	1600	64.5	198.7	II	NC	NC	NC
A	1520	1500	1119	1800	68.2	196.3	II	NC	NC	NC
A¹	1521	1500	1118	1200	69.2	199.1	II	NC	NC	NC
A¹	1699	1675	1249	1600	77.2	198.7	II	NC	NC	NC
A¹	1836	1810	1350	1600	82.1	195.7	II	NC	NC	C-II
B	1378	1360	1014	1600	62.7	199.1	II	NC	NC	NC
B	1420	1400	1044	1200	66.9	206.1	II	NC	NC	NC
B	1521	1500	1119	1600	68.8	198.0	II	NC	NC	NC
B	1597	1575	1174	1800	71.6	196.0	II	NC	NC	NC
B¹	1622	1600	1193	1200	73.7	198.9	II	NC	NC	NC
B¹	1774	1749	1305	1600	79.9	196.9	II	NC	NC	NC
B¹	1938	1911	1425	1600	86.2	194.7	II	NC	NC	C-II
B¹	2282	2250	1678	1800	110.6	212.1	II	NC	NC	C-II
C	1429	1410	1051	1600	64.9	198.6	II	NC	NC	NC
C	1521	1500	1118	1200	71.7	206.3	II	NC	NC	NC
C	1622	1600	1193	1600	73.4	197.8	II	NC	NC	NC
C	1673	1650	1230	1600	78.3	204.8	NC	NC	NC	C-II
C	1673	1650	1230	1800	74.9	195.7	II	NC	NC	C-II
C¹	1723	1700	1267	1200	78.9	200.1	II	NC	NC	NC
C¹	1876	1850	1379	1600	83.7	195.2	II	NC	NC	NC
C¹	2040	2012	1500	1600	90.7	194.6	II	NC	NC	NC
C¹	2400	2365	1765	1800	115.8	211.1	II	NC	NC	C-II
D¹	2587	2551	1903	1800	124.6	210.9	II	NC	NC	NC

¹ High displacement engine (HD)

(continued)

3512C

PROPULSION ENGINE

Electronic Control System

3512E

PROPULSION ENGINE

Electronic Control System

(continued)

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	6.69 x 7.48 in	170 x 190 mm
Bore x Stroke ¹	6.69 x 8.46 in	170 x 215 mm
Displacement	3161 cu in	51.8 liter
Displacement ¹	3574 cu in	58.6 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	14,400 - 16,340 lb	6532 - 7411 kg

¹ High displacement engine (HD)

DIMENSIONS

	LE	H	WE
min.	102.0 in/2590 mm	75.0 in/1904 mm	80.2 in/2037 mm
max.	105.1 in/2669 mm	88.3 in/2242 mm	87.9 in/2232 mm

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	1360	1341	1000	1600	61.0	196.4	II/III	T4C	EUV	NC
A	1523	1502	1120	1600	67.7	194.6	II/III	T4C	EUV	NC
A	1523	1502	1120	1800	71.0	204.1	II/III	T4C	NC	NC
A	1724	1700	1268	1600	76.3	193.7	II/III	T4C	EUV	NC
A	1835	1810	1350	1600	81.3	193.9	II/III	T4C	EUV	NC
A	2028	2000	1491	1600	90.1	194.4	II/III	T4C	NC	NC
A	2282	2250	1678	1800	104.9	201.2	II/III	T4C	NC	NC
B	1598	1576	1175	1800	73.9	202.4	II/III	T4C	NC	NC
B	2142	2112	1575	1600	95.4	194.8	II/III	T4C	NC	NC
B	2408	2375	1771	1800	110.9	201.5	II/III	T4C	NC	NC
C	1673	1650	1230	1800	77.0	201.5	II/III	T4C	NC	NC
C	2244	2213	1650	1600	100.1	195.2	II/III	T4C	NC	NC
C	2585	2250	1901	1800	118.3	200.3	II/III	T4C	NC	NC

All high displacement engines (HD).

All ratings can be configured as an IMO II engine without aftertreatment.

(continued)

3512E

PROPULSION ENGINE

Electronic Control System

(continued)

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	6.69 x 8.46 in	170 x 215 mm
Displacement	3574 cu in	58.6 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	16,508 lb	7488 kg

DIMENSIONS

	LE	H	WE
min.	104.2 in/2624 mm	87.5 in/2222.6 mm	80.2 in/2037 mm
max.	104.2 in/2624 mm	87.5 in/2222.6 mm	80.2 in/2037 mm

3516C

PROPULSION ENGINE

Electronic Control System

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	2028	2000	1491	1600	92.2	198.9	II	NC	NC	NC
A'	2162	2132	1590	1600	100.3	203.0	NC	NC	NC	C-II
A'	2292	2260	1685	1600	104.1	198.6	II	NC	NC	NC
A'	2482	2448	1825	1600	111.2	196.1	II	NC	NC	C-II
B	2130	2100	1566	1600	96.3	198.0	II	NC	NC	NC
B'	2271	2240	1670	1600	104.9	202.1	NC	NC	NC	C-II
B'	2407	2375	1771	1600	108.4	196.9	II	NC	NC	NC
B'	2611	2575	1920	1600	116.3	194.9	II	NC	NC	C-II
B'	3046	3005	2240	1800	143.6	206.3	II	NC	NC	C-II
C	2231	2200	1640	1600	101.0	198.1	II	NC	NC	NC
C'	2380	2347	1750	1600	110.4	203.1	NC	NC	NC	C-II
C'	2534	2500	1864	1600	113.3	195.5	II	NC	NC	NC
C'	2712	2675	1995	1600	125.0	201.6	NC	NC	NC	C-II
C'	2720	2682	2000	1600	121.0	194.7	II	NC	NC	NC
C'	3196	3150	2350	1800	149.9	205.3	II	NC	NC	C-II
D'	2855	2816	2100	1600	127.4	195.2	II	NC	NC	NC
D'	3434	3385	2525	1800	159.9	203.7	II	NC	NC	NC

¹ High displacement engine (HD)

(continued)

3516C

PROPULSION ENGINE

Electronic Control System

3516E

PROPULSION ENGINE

Electronic Control System

(continued)

SPECIFICATIONS

Vee 16, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	6.69 x 7.48 in	170 x 190 mm
Bore x Stroke¹	6.69 x 8.46 in	170 x 215 mm
Displacement	4211 cu in	69 liter
Displacement¹	4765 cu in	78 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	17,550 - 19,025 lb	7964 - 8629 kg

¹ High displacement engine (HD)

DIMENSIONS

	LE	H	WE
min.	143.1 in/3637 mm	77.4 in/1967 mm	80.2 in/2037 mm
max.	148.0 in/3761 mm	84.6 in/2150 mm	84.3 in/2142 mm

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
A	2536	2501	1865	1600	114.6	197.7	II/III	T4C	NC	NC
A	2720	2682	2000	1600	122.7	197.4	II/III	T4C	NC	NC
A	3046	3004	2240	1800	140.7	202.2	II/III	T4C	NC	NC
B	2855	2816	2100	1600	128.9	197.6	II/III	T4C	NC	NC
B	3195	3151	2350	1800	146.4	200.4	II/III	T4C	NC	NC
C	2991	2950	2200	1600	135.5	198.1	II/III	T4C	NC	NC
C	3433	3386	2525	1800	157.0	200.1	III	T4C	NC	NC
D*	3433	3386	2525	1800	157.0	200.1	II	NC	NC	NC
D	3549	3500	2610	1800	162.3	200.1	III	T4C	NC	NC

All ratings are high displacement.

All ratings, except 2610 bkW, can be configured as an IMO II engine without aftertreatment.

* IMO II 2525 bkW must comply with D-Tier rated duty cycle when operated with Aftertreatment not installed or disabled.

SPECIFICATIONS

Vee 16, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	6.69 x 8.46 in	170 x 215 mm
Displacement	4765 cu in	78 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	21,164 lb	9600 kg

DIMENSIONS

	LE	H	WE
min.	125.7 in/3192 mm	87.6 in/2225 mm	89.9 in/2284 mm
max.	125.7 in/3192 mm	87.6 in/2225 mm	89.9 in/2284 mm

3516E

Electronic Control System

PROPULSION ENGINE (High Performance Applications)

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
D	3196	3151	2350	1800	154.1	211.1	II	NC	NC	NC
D	3807	3755	2800	1800	179.7	206.5	II	NC	NC	NC
D	4079	4023	3000	1800	193.1	207.1	II	NC	NC	NC

SPECIFICATIONS

Vee 16, 4-Stroke-Cycle Diesel		
Aspiration	Sequential Turbocharged-Aftercooled	
Bore x Stroke	6.69 x 8.46 in	170 x 215 mm
Displacement	4765 cu in	78.1 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	24,250 lb	11,000 kg

DIMENSIONS

	LE	H	WE
min.	177.8 in/4515 mm	97.6 in/2478 mm	72.6 in/1845 mm
max.	177.8 in/4515 mm	97.6 in/2478 mm	72.6 in/1845 mm

C280-6

Electronic Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	2352	2320	1730	900	110	203.5	II	NC	NC	NC
CS	2515	2481	1850	1000	120	206.6	II	NC	NC	NC
MC	2583	2548	1900	900	121	204.0	II	NC	NC	NC
MC	2760	2722	2030	1000	131	205.4	II	NC	NC	NC

C280 fuel rate is at full load on the prop curve, BSFC is at full power condition.

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	6773 cu in	111 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	34,496 lb	15,680 kg

DIMENSIONS

	LE	H	WE
min.	158 in/4013 mm	108 in/2743 mm	71 in/1803 mm
max.	158 in/4013 mm	108 in/2743 mm	71 in/1803 mm

C280-8

PROPULSION ENGINE

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	3127	3084	2300	900	151	209.9	II	NC	NC	NC
CS	3345	3299	2460	1000	170	221.0	II	NC	NC	NC
MC	3440	3393	2530	900	166	210.0	II	NC	NC	NC
MC	3684	3634	2710	1000	186	219.0	II	NC	NC	NC
MC	4078	4023	3000	1000	195	207.2	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	3345	3299	2460	1000	152	197.5	III	T4C	NC	NC
MC	3684	3634	2710	1000	168	198.4	III	T4C	NC	NC

C280 fuel rate is at full load on the prop curve, BSFC is at full power condition.

SPECIFICATIONS

In-line 8, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	9031 cu in	148 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	41,800 lb	19,000 kg

DIMENSIONS

	LE	H	WE
min.	195 in/4953 mm	104 in/2642 mm	71 in/1803 mm
max.	195 in/4953 mm	104 in/2642 mm	71 in/1803 mm

C280-12

PROPULSION ENGINE

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	4704	4640	3460	900	208	193.8	II	NC	NC	NC
CS	5031	4962	3700	1000	239	206.6	II	NC	NC	NC
MC	5167	5096	3800	900	214	194.0	II	NC	NC	NC
MC	5520	5444	4060	1000	261	205.4	II	NC	NC	NC
MC/FCV	6118	6035	4500	1000	292	207.0	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	5031	4962	3700	1000	233	201.1	III	T4C	NC	NC
MC	5520	5444	4060	1000	255	200.4	III	T4C	NC	NC

C280 fuel rate is at full load on the prop curve, BSFC is at full power condition.

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	13,546 cu in	222 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	57,276 lb	25,980 kg

DIMENSIONS

	LE	H	WE
min.	182 in/4623 mm	134 in/3404 mm	80 in/2032 mm
max.	182 in/4623 mm	134 in/3404 mm	80 in/2032 mm

C280-16

Electronic Control System

PROPULSION ENGINE

RATINGS AND FUEL CONSUMPTION

IMO II

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS	6255	6169	4600	900	302	209.9	II	NC	NC	NC
CS	6690	6598	4920	1000	340	220.6	II	NC	NC	NC
MC	6879	6785	5060	900	333	210.0	II	NC	NC	NC
MC	7369	7268	5420	1000	371	218.7	II	NC	NC	NC
MC/FCV	7682	7577	5650	1000	366	207.0	II	NC	NC	NC
MC/FCV	8158	8046	6000	1000	389	207.2	II	NC	NC	NC
MC**	8834	8713	6500	1000	431	212	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
CS*	6255	6169	4600	900	282	195.4	III	T4C	NC	NC

C280 fuel rate is at full load on the prop curve, BSFC is at full power condition.
Arrangements are available with front mounted turbochargers or rear mounted turbochargers
FMT requires remote mounted (Shipped Loose) heat exchanger for the Oil Cooler.
FMT duplex Oil filters are ship loose and require remote mounting and plumbing.
Single circuit cooling system is not available with FMT configuration.

* 4600 bkW IMO III rating available with E2 cycle for CPP applications only.
** MCR for Naval applications. Please consult A&I team with application details.

(continued)

C280-16

Electronic Control System

PROPULSION ENGINE

(continued)

SPECIFICATIONS

Vee 16, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	18,062 cu in	296 liter
Rotation (from flywheel end)	Counterclockwise or clockwise	
Engine dry weight (approx)	68,343 lb	31,000 kg

DIMENSIONS

	LE	H	WE
min.	224 in/5690 mm	134 in/3404 mm	80 in/2032 mm
max.	224 in/5690 mm	134 in/3404 mm	80 in/2032 mm

DEP

DIESEL ELECTRIC PROPULSION - 50 HZ

RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
C4.4 ¹	95.3	71.1	1500	5.3	258.6	NST	T3C	EUV	NC
C4.4 ¹	116.4	86.8	1500	6.2	227.5	NST	T3C	EUV	C-II
C4.4 ¹	145.6	108.6	1500	7.4	217.9	NST	T3C	EUV	C-II
C7.1	146.5	109.3	1500	7.9	229.6	NST	T3C	EUV	C-II
C7.1	172.9	129	1500	9.2	227.5	NST	T3C	EUV	C-II
C7.1	219.8	164	1500	11.2	216.5	II/III	T3C	NC	C-II
C9.3	292	218	1500	13.5	198.7	II	NC	NC	C-II
C9.3	282	210	1500	13.4	204.7	II/III	NC	NC	NC
C9.3	362	270	1500	16.6	198.3	II	NC	NC	C-II
C9.3	351	262	1500	16.9	206.9	II/III	NC	NC	NC
C18	404	301	1500	19.2	205.6	II	NC	NC	NC
C18	514	383	1500	24.4	205.0	II	NC	NC	NC
C18 ²	514	383	1500	24.9	206.6	II/III	NC	NC	NC
C18	514	383	1500	23.7	198.9	NC	NC	EUV	NC
C18	587	438	1500	28.7	208.2	II	NC	NC	NC
C18	587	438	1500	28.2	204.8	II/III	NC	NC	NC
C18	617	460	1500	28.2	197.3	NC	NC	EUV	NC
C18	660	492	1500	31.3	204.7	II	NC	NC	NC
C18	660	492	1500	31.1	203.8	II/III	NC	NC	NC
C32	791	590	1500	36.7	200	II	NC	NC	C-I
C32	923	688	1500	42.6	199.1	II	NC	NC	C-I
C32	1172	874	1500	53.8	198.2	III	NC	NC	NC
C32	1172	874	1500	55.2	203.1	II/III	NC	NC	NC
C32	1172	874	1500	55.4	204	NC	NC	EUV	NC

¹ C4.4 electronic.
² Only available via DTO. Fuel sulfur restrictions apply.

DEP

DIESEL ELECTRIC PROPULSION - 50 HZ

(continued)

RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512B	1686	1257	1500	77.4	195.7	II	NC	NC	NC
3512C	1826	1362	1500	84.7	197.5	II	NC	NC	NC
3512E ³	1694	1263	1500	77	194	II/III	NC	NC	NC
3516C	2303	1717	1500	110.3	203.9	II	NC	NC	NC
3516C	2600	1940	1500	122.6	200.8	II	NC	NC	NC
3516E ³	2301	1716	1500	106	197.5	II/III	NC	NC	NC
3516E ³	2598	1937	1500	120	197	II/III	NC	NC	NC
C280-6	2481	1850	1000	118.9	193.6	II	NC	NC	NC
C280-6	2722	2030	1000	129.0	197.0	II	NC	NC	NC
C280-8	3299	2460	1000	170.0	220.6	II	NC	NC	NC
C280-8	3634	2710	1000	186.0	218.7	II	NC	NC	NC
C280-12	4962	3700	1000	239.0	206.6	II	NC	NC	NC
C280-12	5445	4060	1000	261.0	205.4	II	NC	NC	NC
C280-16	6598	4920	1000	307.0	197.9	II	NC	NC	NC
C280-16	7268	5420	1000	340.0	199.7	II	NC	NC	NC

C280 fuel rate at rated power, BSFC is at full power condition.
³ High displacement engine (HD)

(continued)

RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
C4.4 ¹	95.3	71.1	1800	5.5	247.1	NST	T3C	EUV	NC
C4.4 ¹	109.2	81.5	1800	5.9	222.8	NST	T3C	EUV	C-II
C4.4 ¹	145.6	108.6	1800	7.5	217.5	NST	T3C	EUV	C-II
C4.4 ¹	172.9	129	1800	8.3	211.0	NST	T3C	EUV	C-II
C7.1	172.9	129	1800	9.5	221.2	NST	T3C	EUV	C-II
C7.1	219.7	163.9	1800	11.3	212.6	II/III	T3C	NC	C-II
C7.1	256.4	191.3	1800	13.2	208.6	II/III	T3C	NC	C-II
C7.1	293.0	218.6	1800	14.9	207.1	II/III	T3C	NC	C-II
C9.3	369	275	1800	18.0	211.0	II	T3C	NC	C-II
C9.3	363	271	1800	17.9	212.7	II/III	NC	NC	NC
C9.3	436	325	1800	21.1	208.7	II	T3C	NC	C-II
C18	499	372	1800	24.6	212.5	II	NC	NC	C-I
C18	624	465	1800	30.5	211.0	II	NC	NC	NC
C18	624	465	1800	31.2	216	II	T3C	NC	C-II
C18	624	465	1800	31.1	215.1	NC	NC	EUV	NC
C18	803	599	1800	39.1	209.9	II	T3C	NC	NC
C18	803	599	1800	39.9	214.1	II/III	T3C	NC	NC
C18	803	599	1800	39.2	210.6	NC	NC	EUV	NC
C32	916	683	1800	43.9	206.8	II	NC	NC	C-I
C32	1047	781	1800	50.1	206.4	II	NC	NC	C-I
C32	1047	781	1800	52.6	216.6	II/III	NC	NC	NC
C32	1333	994	1800	62.8	203.3	II/III	NC	NC	C-I
C32	1333	994	1800	62.0	200.5	III	T4C	NC	NC
C32	1333	994	1800	63.8	206.5	NC	NC	EUV	NC

¹ C4.4 electronic
² High displacement engine (HD)

(continued)

(continued) RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512C	1920	1431	1800	91.9	204.0	II	NC	NC	NC
3512C	2183	1628	1800	110.2	215.1	II	NC	NC	NC
3512C	2400	1790	1800	119.7	212.4	II	NC	NC	NC
3512E ²	2188	1632	1800	104.0	202.4	II/III	T4C	NC	NC
3512E ²	2400	1789	1800	113.2	200.9	II/III	T4C	NC	NC
3516C	2575	1920	1800	120.6	202.0	II	NC	NC	NC
3516C	2809	2095	1800	132.0	200.2	II	NC	NC	NC
3516C	2984	2225	1800	140.6	200.1	II	NC	NC	NC
3516C	3151	2350	1800	148.9	201.4	II	NC	NC	NC
3516E ²	2576	1921	1800	122.7	202.9	II/III	T4C	NC	NC
3516E ²	2823	2105	1800	135.1	203.7	II/III	T4C	NC	NC
3516E ²	3175	2368	1800	152.4	204.3	II/III	T4C	NC	NC
C280-6	2320	1730	900	102.0	197.7	II	NC	NC	NC
C280-6	2548	1900	900	118.0	193.6	II	NC	NC	NC
C280-8	3084	2300	900	142.0	197.7	III	T4C	NC	NC
C280-8	3084	2300	900	144.0	199.5	II	NC	NC	NC
C280-8	3393	2530	900	154.0	193.6	III	T4C	NC	NC
C280-8	3393	2530	900	156.0	197.0	II	NC	NC	NC
C280-12	4640	3460	900	216.0	199.6	III	T4C	NC	NC
C280-12	4640	3460	900	205.0	188.7	II	NC	NC	NC
C280-12	5096	3800	900	237.0	198.3	III	T4C	NC	NC
C280-12	5096	3800	900	237.0	199.0	II	NC	NC	NC
C280-16	6169	4600	900	279.0	192.6	III	T4C	NC	NC
C280-16	6169	4600	900	304.7	202.0	II	NC	NC	NC
C280-16	6786	5060	900	312.0	197.0	III	T4C	NC	NC
C280-16	6786	5060	900	318.0	200.8	II	NC	NC	NC

² High displacement engine (HD)
C280 fuel rate at rated power, BSFC is at full power condition.

Cat Generator Sets and Auxiliary Engines



With more than 80 years of marine power experience, we offer a wide array of generator sets spanning from 10 ekW (10 kVA) to 5200 ekW (6500 kVA). Cat marine generator sets and auxiliary engines combine proven design and manufacturing methods with the latest technology, such as advanced control for more power and efficiency, and enhanced monitoring that keeps you ahead of any issues that could potentially affect your uptime and productivity.

We're built to provide the power you work with and live by.

C1.5 GENERATOR SET

Mechanical Control System

RATINGS AND FUEL CONSUMPTION

Three Phase ekW@0.8pf	Single Phase ekW@1.0pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
12.0		15.0	60	1800	1.2	269.0	NST	T3C	NST	NC
10.0		12.5	50	1500	1.0	259.4	NST	T3C	NST	NC
	12.0	12.0	60	1800	1.2	269.0	NST	T3C	NST	NC
	10.0	10.0	50	1500	1.0	259.4	NST	T3C	NST	NC

SPECIFICATIONS

In-line 3, 4-Stroke-Cycle Diesel		
Aspiration	NA	
Bore x Stroke	3.31 x 3.5 in	84 x 90 mm
Displacement	91 cu in	1.5 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	703/908 lb	319/412 kg

DIMENSIONS

	LE	H	WE
Open	40.8 in/1038 mm	27.1 in/689 mm	21.1 in/535 mm
Enclosed	43.1 in/1095 mm	27.9 in/711 mm	24 in/608 mm

C2.2

GENERATOR SET

Mechanical Control System

RATINGS AND FUEL CONSUMPTION

Three Phase ekW@.8pf	Single Phase ekW@1.0pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
18.0		22.5	60	1800	1.63	256.4	NST	T3C	NC	NC
25.0		31.25	60	1800	2.24	239.8	NST	T3C	NC	NC
15.0		18.75	50	1500	1.37	242.6	NST	T3C	NC	NC
20.0		25.0	50	1500	1.88	233.0	NST	T3C	NC	NC
	18.0	18.0	60	1800	1.63	256.4	NST	T3C	NC	NC
	25.0	25.0	60	1800	2.24	239.8	NST	T3C	NC	NC
	15.0	15.0	50	1500	1.37	242.6	NST	T3C	NC	NC
	20.0	20.0	50	1500	1.88	233.0	NST	T3C	NC	NC

SPECIFICATIONS

In-line 4, 4-Stroke-Cycle Diesel		
Aspiration	NA, T	
Bore x Stroke	3.31 x 3.94 in	84 x 100 mm
Displacement	135 cu in	2.2 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	857/1027 lb	389/466 kg

DIMENSIONS

	LE	H	WE
Open	47.9 in/1219 mm	32.8 in/835 mm	22.3 in/567 mm
Enclosed	50.7 in/1290 mm	31.0 in/775 mm	24.7 in/628 mm

C4.4

GENERATOR SET

Mechanical Control System

RATINGS AND FUEL CONSUMPTION

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
38.0	47.5	50	1500	2.9	195.1	NST	NC	NC	NC
51.0	64.5	50	1500	3.9	201.5	NST	NC	NC	NC
69.0	86.0	50	1500	4.9	207.7	NST	NC	NC	NC
86.0	107.0	50	1500	6.5	206.1	NST	NC	NC	NC
44.0	55.0	60	1800	3.4	204.1	NST	NC	NC	NC
58.0	73.0	60	1800	4.2	206.3	NST	NC	NC	NC
76.0	95.0	60	1800	5.8	213.3	NST	NC	NC	NC
99.0	123.0	60	1800	7.3	205.2	NST	NC	NC	NC
36.0R	45.0	50	1500	2.9	195.1	NST	NC	NC	NC
49.0R	61.0	50	1500	3.9	201.5	NST	NC	NC	NC
65.0R	81.0	50	1500	4.9	207.7	NST	NC	NC	NC
82.0R	103.0	50	1500	6.5	206.1	NST	NC	NC	NC
42.0R	53.0	60	1800	3.4	204.1	NST	NC	NC	NC
56.0R	70.0	60	1800	4.5	206.3	NST	NC	NC	NC
72.0R	90.0	60	1800	5.8	213.3	NST	NC	NC	NC
95.0R	119.0	60	1800	7.3	205.2	NST	NC	NC	NC

R - Radiator cooled only.
Engine type approval available from ABS, BV, CCS, CRS, DNV, LR, RINA. (continued)

(continued)

SPECIFICATIONS

In-line 4, 4-Stroke-Cycle Diesel		
Aspiration	NA, T, TA	
Bore x Stroke	4.13 x 5.0 in	105 x 127 mm
Displacement	269 cu in	4.4 L
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	1664 - 2372 lb	754 - 1076 kg

DIMENSIONS

	LE	H	WE
Open min.	56.0 in/1422 mm	39.8 in/1010 mm	27.6 in/700 mm
Open max.	73.3 in/1861 mm	46.2 in/1174 mm	32.3 in/821 mm
Enclosed	68.9 in/1750 mm	47.8 in/1215 mm	39.4 in/1000 mm

RATINGS AND FUEL CONSUMPTION

IMO II and U.S. EPA Tier 3

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
65	81	50	1500	5.3	247.7	NST	T3C	EUV	NC
80	100	50	1500	5.7	221.7	NST	T3C	EUV	C-II
99	124	50	1500	6.8	210.8	NST	T3C	EUV	C-II
65	81	60	1800	5.5	248.0	NST	T3C	EUV	NC
75	94	60	1800	5.3	217.7	NST	T3C	EUV	C-II
99	124	60	1800	6.7	208.9	NST	T3C	EUV	C-II
118	148	60	1800	7.9	206.6	NST	T3C	EUV	C-II
58R	73	50	1500	5.3	247.4	NST	T3C	EUV	NC
73R	91	50	1500	5.7	209.0	NST	T3C	EUV	C-II
88R	110	50	1500	6.8	196.1	NST	T3C	EUV	C-II
56R	64	60	1800	5.5	247.2	NST	T3C	EUV	NC
66R	83	60	1800	5.3	213.3	NST	T3C	EUV	C-II
90R	113	60	1800	6.7	204.9	NST	T3C	EUV	C-II
105R	131	60	1800	7.9	200.8	NST	T3C	EUV	C-II

Engine type approval available from ABS, BV, CCS, DNV, LR, NKK, PR, RINA. (continued)

C4.4

GENERATOR SET

Electronic Control System

(continued)

SPECIFICATIONS

In-line 4, 4-Stroke-Cycle Diesel		
Aspiration	T, TA	
Bore x Stroke	4.13 x 5.0 in	105 x 127 mm
Displacement	269 cu in	4.4 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	2736 - 3389 lb	1241 - 1537 kg

DIMENSIONS

	LE	H	WE
min.	66.4 in/1687 mm	49 in/1245 mm	38.3 in/974 mm
max.	80.2 in/2037 mm	78.7 in/1999 mm	38.8 in/986 mm

C7.1

GENERATOR SET

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II and IMO II/III Switchable, U.S. EPA Tier 3

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
100	125	50	1500	7.9	233.7	NST	T3C	EUV	C-II
118	148	50	1500	9.2	224.1	NST	T3C	EUV	C-II
150	188	50	1500	11.2	210.2	II/III	T3C	NC	C-II
118	148	60	1800	9.5	221.5	NST	T3C	EUV	C-II
150	188	60	1800	11.3	212.9	II/III	T3C	NC	C-II
175	219	60	1800	13.2	208.9	II/III	T3C	NC	C-II
200	250	60	1800	14.9	207.3	II/III	T3C	NC	C-II
92R	115	50	1500	7.8	223.7	NST	T3C	EUV	C-II
111R	139	50	1500	9.3	221.8	NST	T3C	EUV	C-II
143R	179	50	1500	11.3	207.5	II/III	T3C	NC	C-II
106R	133	60	1800	9.1	228.7	NST	T3C	EUV	C-II
138R	173	60	1800	11.1	212.8	II/III	T3C	NC	C-II
163R	204	60	1800	12.7	215.9	II/III	T3C	NC	C-II

Engine type approval available from ABS, BV, DNV, LR, NKK, RINA, CRS, CCS.
All ratings subject to IMO can be configured as an IMO II engine without aftertreatment.

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.3 in	105 x 135 mm
Displacement	433.3 cu in	7.01 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	3355 - 4718 lb	1522 - 2140 kg

DIMENSIONS

	LE	H	WE
min.	76.3 in/1940 mm	49.7 in/1263 mm	37.6 in/956 mm
max.	102 in/2582 mm	62.3 in/1583 mm	39.0 in/993 mm

RATINGS AND FUEL CONSUMPTION

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
200	250	50	1500	13.2	199.1	II	NC	NC	C-II ²
195	244	50	1500	13.2	204.8	II/III	NC	NC	NC
250	313	50	1500	16.5	198.5	II	NC	NC	C-II ²
245	306	50	1500	16.8	207	II/III	NC	NC	NC
250	313	60	1800	17.6	212.3	II	T3C	NC	C-II ²
250	313	60	1800	17.7	213.4	II/III	NC	NC	NC
300	375	60	1800	20.8	208.9	II	T3C	NC	C-II ²
185R	231	50	1500	13.2	199.1	II	NC	NC	C-II ²
180R	225	50	1500	13.2	204.8	II/III	NC	NC	NC
235R	294	50	1500	16.5	198.5	II	NC	NC	C-II ²
230R	288	50	1500	16.8	207	II/III	NC	NC	NC
224R	280	60	1800	17.6	212.3	II	T3C	NC	C-II ²
224R	280	60	1800	17.7	213.4	II/III	NC	NC	NC
274R	343	60	1800	20.8	208.9	II	T3C	NC	C-II ²

² Only available via DTO.

(continued) SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.31 in	115 x 149 mm
Displacement	568 cu in	9.3 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	5219 lb	2367 kg

DIMENSIONS

	LE	H	WE
min.	85.8 in/2179 mm	56.5 in/1436 mm	50.4 in/1260 mm
max.	85.8 in/2179 mm	56.5 in/1436 mm	50.4 in/1260 mm

(continued)

RATINGS AND FUEL CONSUMPTION

IMO II

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
280	350	50	1500	19.4	205.9	II	NC	NC	NC
360	450	50	1500	24.5	205.4	II	NC	NC	C-II ²
360 ¹	450	50	1500	24.3	203.7	II/III	NC	NC	NC
410	513	50	1500	27.9	204.5	II	NC	NC	C-II ²
410	513	50	1500	27.5	201.9	II/III	NC	NC	NC
465	581	50	1500	31.4	205.4	II	NC	NC	C-II ²
465	581	50	1500	31.2	203.8	II/III	NC	NC	NC
345	431	60	1800	24.7	213.3	II	NC	NC	C-II ²
430	538	60	1800	30.6	211.3	II	NC	NC	C-II ²
565	706	60	1800	39.3	210.4	II	NC	NC	C-II ²
565	706	60	1800	39.9	214.1	II/III	NC	NC	NC
260R	325	50	1500	19.2	205.6	II	NC	NC	NC
335R	419	50	1500	24.4	205.0	II	NC	NC	C-II ²
335R ¹	419	50	1500	24.3	203.7	II/III	NC	NC	NC
390R	486	50	1500	27.9	205.0	II	NC	NC	C-II ²
390R	486	50	1500	27.5	201.9	II/III	NC	NC	NC
445R	556	50	1500	31.3	204.7	II	NC	NC	C-II ²
445R	556	50	1500	31.2	203.8	II/III	NC	NC	NC
310R	388	60	1800	24.7	213.3	II	NC	NC	C-II ²
395R	494	60	1800	30.5	211.0	II	NC	NC	C-II ²
530R	663	60	1800	39.1	209.9	II	NC	NC	C-II ²
530R	663	60	1800	39.9	214.1	II/III	NC	NC	NC

Generator set package includes SRMP generator.
¹ Only available via DTO. Fuel sulfur restrictions apply.
² Only available by DTO.

(continued) RATINGS AND FUEL CONSUMPTION

IMO II and U.S. EPA Tier 3

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
430	538	60	1800	31.3	214.9	II	T3C	NC	C-II ²
565	706	60	1800	38.9	206.9	II	T3C	NC	C-II ²
565	706	60	1800	39.9	214.1	II/III	T3C	NC	NC
395R	594	60	1800	31.2	216	II	T3C	NC	C-II ²
530R	663	60	1800	38.9	206.9	II	T3C	NC	C-II ²
530R	663	60	1800	39.9	214.1	II/III	T3C	NC	NC

Generator set package includes SRMP generator.
² Only available by DTO.

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA, TTA	
Bore x Stroke	5.7 x 7.2 in	145 x 183 mm
Displacement	1106 cu in	
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	8733 - 9974 lb	3961 - 4524 kg

DIMENSIONS

	LE	H	WE
min.	119.7 in/3040 mm	66.3 in/1684 mm	60.9 in/1547 mm
max.	119.7 in/3040 mm	66.3 in/1684 mm	60.9 in/1547 mm

RATINGS AND FUEL CONSUMPTION

IMO II/IMO III

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
550	688	50	1500	37.2	199.8	II	NC	NC	NC*
830	1038	50	1500	55.9	203.1	II	NC	NC	NC*
830	1038	50	1500	56.7	206.3	II/III	NC	NC	NC
730	913	60	1800	50.8	206.4	II	NC	NC	NC*
730	913	60	1800	52.6	216.6	II/III	NC	NC	NC
940	1175	60	1800	62.8	203.3	II	NC	NC	NC*
940	1175	60	1800	62.8	203.3	II/III	NC	NC	NC
525R	656	50	1500	37.2	199.8	II	NC	NC	NC*
795R	994	50	1500	55.9	203.1	II	NC	NC	NC*
795R	994	50	1500	56.7	206.3	II/III	NC	NC	NC
675R	844	60	1800	50.8	206.4	II	NC	NC	NC*
675R	844	60	1800	52.6	216.6	II/III	NC	NC	NC
880R	1100	60	1800	62.8	203.3	II	NC	NC	NC*
880R	1100	60	1800	62.8	203.3	II/III	NC	NC	NC

Heat Exchanger (32°C Sea Water Temp), Keel Cooled (52°C SCAC Temp).
* China II certification expected mid-2023.
Check with your local dealer for availability.

(continued)

(continued) RATINGS AND FUEL CONSUMPTION

IMO III and U.S. EPA Tier 4 Final

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
830	1038	50	1500	54.1	198.3	III	NC	NC	NC*
940	1175	60	1800	61.9	200.4	III	T4C	NC	NC*
795R	994	50	1500	54.1	198.3	III	NC	NC	NC*
880R	844	60	1800	61.9	200.4	III	T4C	NC	NC*

Heat Exchanger (32°C Sea Water Temp), Keel Cooled (52°C SCAC Temp)
* China II certification expected mid-2023.
Check with your local dealer for availability.

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TTA	
Bore x Stroke	5.7 x 6.4 in	145 x 162 mm
Displacement	1959 cu in	32.1 liter
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	15,721 lb	7131 kg

DIMENSIONS

	LE	H	WE
min.	168.2 in/4271 mm	65.6 in/1667 mm	
max.	175.3 in/4452 mm	65.6 in/1667 mm	

3500

CUSTOM GENERATOR SET

Electronic Control System

C280-6

GENERATOR SET

Electronic Control System

RATINGS AND FUEL CONSUMPTION

	ekW @.8pf	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512C	1360	60	1800	88.9	199.7	II	NC	NC	NC
3512C	1550	60	1800	99	195.2	II	NC	NC	NC
3512C	1700	60	1800	108.9	196.4	II	NC	NC	NC
3516C	2250	60	1800	143.6	196.5	II	NC	NC	NC
3512E	1550	60	1800	100.7	197	II/III	T4C	NC	NC
3512E	1700	60	1800	109.6	197	II/III	T4C	NC	NC
3516E	1825	60	1800	118.3	198.1	II/III	T4C	NC	NC
3516E	2000	60	1800	130.1	198.9	II/III	T4C	NC	NC
3516E	2250	60	1800	146.8	199.4	II/III	T4C	NC	NC
3512E	1200	50	1500	74.6	190	II/III	NC	NC	NC
3516E	1630	50	1500	107	200.5	II/III	NC	NC	NC
3516E	1840	50	1500	118.7	197.2	II/III	NC	NC	NC

Custom package solutions available via DTO, contact your local dealer for more information.
ekW is based on a 95% generator efficiency

RATINGS AND FUEL CONSUMPTION

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
1650	2063	60	900	102	197.7	II	NC	NC	NC
1820	2275	60	900	118	193.6	II	NC	NC	NC
1760	2200	50	1000	119	199.5	II	NC	NC	NC
1940	2425	50	1000	129	197.0	II	NC	NC	NC

Custom package solutions available via DTO, contact your local dealer for more information

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	6773 cu in	111 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	34,500 lb	15,680 kg
Generator weight (approx)	18,000 lb	8165 kg

DIMENSIONS

	LE	LG	H	WE
min.	145 in/3691 mm	280.3 in/7120 mm	154.9 in/3934 mm	77.2 in/1961 mm
max.	145 in/3691 mm	280.3 in/7120 mm	154.9 in/3934 mm	77.2 in/1961 mm

C280-8

GENERATOR SET

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
2200	2750	60	900	144	197.7	II	NC	NC	NC
2420	3025	60	900	156	197.0	II	NC	NC	NC
2350	2938	50	1000	170	220.6	II	NC	NC	NC
2600	3250	50	1000	186	218.7	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
2200	2750	60	900	142	197.7	III	T4C	NC	NC
2420	3025	60	900	153	193.6	III	T4C	NC	NC

Custom package solutions available via DTO, contact your local dealer for more information

SPECIFICATIONS

In-line 8, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	9031 cu in	148 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	41,800 lb	19,000 kg
Generator weight (approx)	25,000 lb	11,340 kg

DIMENSIONS

	LE	LG	H	WE
min.	178 in/4511 mm	316.5 in/8040 mm	155.0 in/3937 mm	77.2 in/1961 mm
max.	178 in/4511 mm	316.5 in/8040 mm	155.0 in/3937 mm	77.2 in/1961 mm

C280-12

GENERATOR SET

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3300	4125	60	900	205	188.7	II	NC	NC	NC
3640	4550	60	900	237	199.0	II	NC	NC	NC
3520	4400	50	1000	239	206.6	II	NC	NC	NC
3880	4850	50	1000	261	205.4	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3300	4125	60	900	216	199.6	III	T4C	NC	NC
3640	4550	60	900	236	198.3	III	T4C	NC	NC

Custom package solutions available via DTO, contact your local dealer for more information

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	13546 cu in	222 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	57,276 lb	25,980 kg
Generator weight (approx)	33,000 lb	14,790 kg

DIMENSIONS

	LE	LG	H	WE
min.	161 in/4087 mm	316.5 in/8040 mm	160.8 in/4085 mm	78.7 in/2000 mm
max.	161 in/4087 mm	316.5 in/8040 mm	160.8 in/4085 mm	78.7 in/2000 mm

C280-16

GENERATOR SET

Electronic Control System

C4.4

GENERATOR SET ENGINE / AUXILIARY

Electronic Control System

RATINGS AND FUEL CONSUMPTION

IMO II

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
4400	5500	60	900	304.7	202.0	II	NC	NC	NC
4840	6050	60	900	318.0	200.8	II	NC	NC	NC
4700	5875	50	1000	307.0	197.9	II	NC	NC	NC
5200	6500	50	1000	340.0	199.7	II	NC	NC	NC

IMO III and U.S. EPA Tier 4

ekW@.8pf	kVA	Hz	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
4400	5500	60	900	278	192.6	III	T4C	NC	NC
4840	6050	60	900	312	197.0	III	T4C	NC	NC

Custom package solutions available via DTO, contact your local dealer for more information

SPECIFICATIONS

Vee 16, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	11.0 x 11.8 in	280 x 300 mm
Displacement	18,062 cu in	222 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	68,343 lb	31,000 kg
Generator weight (approx)	40,000 lb	18,145 kg

DIMENSIONS

	LE	LG	H	WE
min.	197 in/5007 mm	366.7 in/9314 mm	164.1 in/4167 mm	78.3 in/1990 mm
max.	197 in/5007 mm	366.7 in/9314 mm	164.1 in/4167 mm	78.3 in/1990 mm

RATINGS AND FUEL CONSUMPTION

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
95.3	71.1	1500	5.3	247.5	NST	T3C	EUV	NC
116.4	86.8	1500	5.7	225.1	NST	T3C	EUV	C-II
145.6	108.6	1500	6.8	217.0	NST	T3C	EUV	C-II
95.3	71.1	1800	5.5	247.1	NST	T3C	EUV	NC
109.3	81.5	1800	5.3	222.8	NST	T3C	EUV	C-II
145.6	108.6	1800	6.7	217.5	NST	T3C	EUV	C-II
173.0	129.0	1800	7.9	211.0	NST	T3C	EUV	C-II

SPECIFICATIONS

In-line 4, 4-Stroke-Cycle Diesel		
Aspiration	T, TA	
Bore x Stroke	4.13 x 5.0 in	105 x 127 mm
Displacement	269 cu in	4.4 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	1200 - 1278 lb	545 - 580 kg

DIMENSIONS

	LE	H	WE
min.	33.7 in/856 mm	40.9 in/1038 mm	30.6 in/778 mm
max.	33.7 in/856 mm	40.9 in/1038 mm	32.0 in/814 mm

RATINGS AND FUEL CONSUMPTION

Variable Speed Auxiliary

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
280	208	2300	14.9	215.1	II	T3C	NC	C-II

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.31 in	105 x 135 mm
Displacement	428 cu in	7.01 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	1676 lb	760 kg

DIMENSIONS

	LE	H	WE
min.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm
max.	43.1 in/1095 mm	34.5 in/876 mm	31.4 in/798 mm

RATINGS AND FUEL CONSUMPTION

Variable Speed Auxiliary

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
249.4	186	2400	14.6	240.0	II	T3C	NC	NC
199.8	149	2400	12.6	256.5	II	T3C	NC	NC
172.9	129	2400	11.3	266.3	II	T3C	EUV	NC

Constant Speed Auxiliary

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
146.2	109.3	1500	7.9	233.6	NST	T3C	EUV	C-II
172.9	129.0	1500	9.2	224.0	NST	T3C	EUV	C-II
219.9	164.0	1500	11.2	210.0	II	T3C	NC	C-II
172.9	129.0	1800	9.5	221.2	NST	T3C	EUV	C-II
219.9	164.0	1800	11.3	212.6	II	T3C	NC	C-II
256.5	191.3	1800	13.2	208.6	II	T3C	NC	C-II
292.3	218.6	1800	14.9	207.1	II	T3C	NC	C-II

(continued)

C7.1

Electronic Control System

GENERATOR SET ENGINE / AUXILIARY

(continued)

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.13 x 5.31 in	105 x 135 mm
Displacement	428 cu in	7.01 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	1512 - 1653 lb	686 - 750 kg

DIMENSIONS

	LE	H	WE
min.	43.8 in/1112 mm	41.6 in/1056 mm	32.2 in/817 mm
max.	43.8 in/1112 mm	41.6 in/1056 mm	32.6 in/829 mm

C9.3

Electronic Control System

GENERATOR SET ENGINE/AUXILIARY

RATINGS AND FUEL CONSUMPTION

Constant Speed

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
292	218	1500	13.5	198.7	II	NC	NC	C-II
282	210	1500	13.4	204.7	II/III	NC	NC	NC
362	270	1500	16.6	198.3	II	NC	NC	C-II
351	262	1500	16.9	206.9	II/III	NC	NC	NC
369	275	1800	18.0	211	II	T3C	NC	C-II
363	271	1800	17.9	212.7	II/III	NC	NC	NC
436	325	1800	21.1	208.7	II	T3C	NC	C-II

Variable Speed Auxiliary

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
375	280	1800	19.3	219.1	II	T3C	NC	C-II

¹ Contact your local dealer for details on availability on IMO III ratings. Power may vary slightly from IMO II rating.

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA	
Bore x Stroke	4.53 x 5.87 in	115 x 149 mm
Displacement	568 cu in	9.3 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	2083 - 2474 lb	945 - 1122 kg

DIMENSIONS

	LE	H	WE
min.	57.2 in/1452 mm	43.0 in/1093 mm	38.5 in/978 mm
max.	57.2 in/1452 mm	43.0 in/1093 mm	38.5 in/978 mm

RATINGS AND FUEL CONSUMPTION

IMO II

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
404	301	1500	19.2	205.6	II	NC	NC	NC
514	383	1500	24.4	205	II	NC	NC	NC
514 ¹	383	1500	24.1	202.7	II/III	NC	NC	NC
587	438	1500	27.9	205	II	NC	NC	NC
587	438	1500	27.5	201.9	II/III	NC	NC	NC
660	492	1500	31.3	204.7	II	NC	NC	NC
660	492	1500	31.1	203.8	II/III	NC	NC	NC
499	372	1800	24.6	212.5	II	NC	NC	NC
624	465	1800	30.5	211	II	NC	NC	NC
803	599	1800	39.1	209.9	II	NC	NC	NC
803	599	1800	39.9	214.1	II/III	NC	NC	NC

¹ Only available via DTO. Fuel sulfur restrictions apply.

IMO II and U.S. EPA Tier 3

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
624	465	1800	31.2	216	II	T3C	NC	C-II
803	599	1800	39.1	209.9	II	T3C	NC	C-II
803	599	1800	39.9	214.1	II/III	T3C	NC	NC

EU Stage V

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
514	383	1500	23.7	198.9	NC	NC	EUV	NC
617	460	1500	28.2	197.3	NC	NC	EUV	NC
624	465	1800	31.1	215.1	NC	NC	EUV	NC
803	599	1800	39.2	210.6	NC	NC	EUV	NC

(continued)

(continued)

SPECIFICATIONS

In-line 6, 4-Stroke-Cycle Diesel		
Aspiration	TA, TTA	
Bore x Stroke	5.7 x 7.2 in	145 x 183 mm
Displacement	1106 cu in	
Rotation (from flywheel end)	Counterclockwise	
Generator set weight (approx)	4299 lb	1950 kg

DIMENSIONS

	LE	H	WE
min.	73.0 in/1854 mm	51.2 in/1300 mm	44.6 in/1134 mm
max.	73.0 in/1854 mm	51.2 in/1300 mm	44.6 in/1134 mm

RATINGS AND FUEL CONSUMPTION

IMO II/IMO III

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
791	590	1500	36.7	199.9	II	NC	NC	NC*
923	688	1500	42.6	199.1	II	NC	NC	NC*
1172	874	1500	55.2	203.1	II	NC	NC	NC*
1172	874	1500	55.2	203.1	II/III	NC	NC	NC
916	683	1800	43.9	206.8	II	NC	NC	NC*
1047	781	1800	50.1	206.4	II	NC	NC	NC*
1047	781	1800	52.6	216.6	II/III	NC	NC	NC
1333	994	1800	62.8	203.3	II	NC	NC	NC*
1333	994	1800	62.8	203.3	II/III	NC	NC	NC

* China II certification expected mid-2023. Check with your local dealer for availability.

IMO III and U.S. EPA Tier 4 Final

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
1172	874	1500	53.9	198.3	III	NC	EUV	NC
1333	994	1800	61.9	200.5	III	T4C	EUV	NC

SPECIFICATIONS

Vee 12, 4-Stroke-Cycle Diesel

Aspiration	TTA	
Bore x Stroke	5.7 x 6.4 in	145 x 162 mm
Displacement	1959 cu in	32.1 liter
Rotation (from flywheel end)	Counterclockwise	
Engine dry weight (approx)	6950 - 7160 lb	3152 - 3248 kg

DIMENSIONS

	LE	H	WE
min.	83.5 in/2121 mm	60.9 in/1547 mm	60.2 in/1528 mm
max.	89.9 in/2284 mm	62.5 in/1587 mm	60.2 in/1528 mm

RATINGS AND FUEL CONSUMPTION

DEP - 50 HZ

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512B	1686	1257	1500	74.9	191.8	II	NC	NC	NC
3512C	1826	1362	1500	82.0	193.7	II	NC	NC	NC
3516C	2303	1717	1500	106.8	197.5	II	NC	NC	NC
3516C	2602	1940	1500	118.7	195.6	II	NC	NC	NC

DEP - 60 HZ

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512C	1920	1431	1800	88.9	199.8	II	NC	NC	NC
3512C	2183	1628	1800	106.7	210.6	II	NC	NC	NC
3512C	2394	1786	1800	115.9	208.3	II	NC	NC	NC
3516C	2575	1920	1800	118.3	198.2	II	NC	NC	NC
3516C	3151	2350	1800	144.2	197.4	II	NC	NC	NC
3512E²	2188	1632	1800	100.7	197	III	T4C	NC	NC
3512E²	2400	1789	1800	109.6	197	III	T4C	NC	NC
3516E²	2576	1921	1800	118.3	198.1	III	T4C	NC	NC
3516E²	2822	2105	1800	130.1	198.9	III	T4C	NC	NC
3516E²	3176	2368	1800	146.8	199.4	III	T4C	NC	NC
3516E^{2,3}	3004	2240	1800	*	*	II/III	NC	NC	NC

* Contact your local dealer for technical specifications.

² High displacement engine (HD).

³ Only available via DTO.

(continued)

3500 SERIES

AUXILIARY/DIESEL ELECTRIC PROPULSION

Electronic Control System

(continued)

RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512C	1920	1432	1800	88.9	199.7	II	NC	NC	NC
3512C¹	2183	1628	1800	99.0	195.2	II	NC	NC	NC
3512C¹	2394	1786	1800	108.9	196.4	II	NC	NC	NC
3516C¹	3151	2350	1800	143.6	196.5	II	NC	NC	NC
3512E¹	2188	1632	1800	100.7	197.0	II/III	T4C	NC	NC
3512E¹	2400	1789	1800	109.6	197.0	II/III	T4C	NC	NC
3516E¹	2576	1921	1800	118.3	198.1	II/III	T4C	NC	NC
3516E¹	2822	2105	1800	130.1	198.9	II/III	T4C	NC	NC
3516E¹	3176	2368	1800	146.8	199.4	II/III	T4C	NC	NC
3512E¹	1694	1263	1500	74.6	190.0	II/III	NC	NC	NC
3516E¹	2301	1716	1500	107	200.5	II/III	NC	NC	NC
3516E¹	2595	1937	1500	118.7	197.2	II/III	NC	NC	NC

¹ Ratings are high displacement (HD).

* kW is based on a 95% generator efficiency.

Contact dealer for design-to-order generator set solutions.

(continued)

3500 SERIES

AUXILIARY/DIESEL ELECTRIC PROPULSION

Electronic Control System

(continued)

RATINGS AND FUEL CONSUMPTION

Variable Speed DEP

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
3512C¹	1810	1350	1600			NC	NC	NC	C-II
3512C²	1911	1425	1600	*	*	II	NC	NC	NC
3512C¹	2365	1678	1600			NC	NC	NC	C-II
3512C²	2319	1729	1800	*	*	II	NC	NC	NC
3512C²	2367	1765	1800	*	*	II	NC	NC	NC
3516C¹	2346	1750	1600			NC	NC	NC	C-II
3516C²	2375	1771	1600	*	*	II	NC	NC	NC
3516C²	2561	1910	1800	*	*	II	NC	NC	NC
3516C²	3005	2240	1800	*	*	II	NC	NC	C-II
3516C²	3151	2350	1800	*	*	II	NC	NC	NC
3512E^{1,2}	1700	1268	1600	*	*	II/III	T4C	NC	NC
3512E^{1,2}	1810	1350	1600	*	*	II/III	T4C	NC	NC
3512E¹	2400	1789	1800	119.7	199.9	II/III	T4C	NC	NC
3516E¹	2576	1921	1800	122.7	202.9	II/III	T4C	NC	NC
3516E¹	3176	2368	1800	152.3	204.3	II/III	T4C	NC	NC

* Contact your local dealer for technical specifications.

¹ High displacement engine (HD).

² Only available via DTO.

(continued)

3500E SERIES

AUXILIARY/DIESEL ELECTRIC PROPULSION

Electronic Control System

(continued)

SPECIFICATIONS

Vee 12, Vee 16, 4-Stroke-Cycle Diesel			
Aspiration		TA	
Bore x Stroke		6.7 x 8.5 in	170 x 215 mm
Displacement	3512E	3576 cu in	58.6 liter
	3516E	4766 cu in	78.1 liter
Engine dry weight (approx)	3512E	19,103 lb	8665 kg
	3516E	22,408 lb	10,164 kg

DIMENSIONS

		LE	H	WE
3512E	min.	127.2 in/3232 mm	86.8 in/2205 mm	85.0 in/2160 mm
	max.	127.2 in/3232 mm	86.8 in/2205 mm	85.0 in/2160 mm
3516E	min.	148.5 in/3773 mm	87.6 in/2224 mm	89.9 in/2284 mm
	max.	148.5 in/3773 mm	87.6 in/2224 mm	89.9 in/2284 mm

C280 SERIES

AUXILIARY

Electronic Control System

RATINGS AND FUEL CONSUMPTION

	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
C280-6	2320	1730	900	102.0	197.7	II	NC	NC	NC
C280-6	2481	1850	1000	119.0	199.5	II	NC	NC	NC
C280-6	2548	1900	900	118.0	193.6	II	NC	NC	NC
C280-6	2722	2030	1000	129.0	197.0	II	NC	NC	NC
C280-8	3084	2300	900	142.0	142.4	III	T4C	NC	NC
C280-8	3084	2300	900	144.0	199.5	II	NC	NC	NC
C280-8	3299	2460	1000	170.0	197.0	II	NC	NC	NC
C280-8	3393	2530	900	153.0	193.6	III	T4C	NC	NC
C280-8	3393	2530	900	156.0	197.0	II	NC	NC	NC
C280-8	3634	2710	1000	186.0	218.7	II	NC	NC	NC
C280-12	4640	3460	900	216.0	199.6	III	T4C	NC	NC
C280-12	4640	3460	900	205.0	188.7	II	NC	NC	NC
C280-12	4962	3700	1000	239.0	199.0	II	NC	NC	NC
C280-12	5096	3800	900	236.0	198.3	III	T4C	NC	NC
C280-12	5096	3800	900	237.0	199.0	II	NC	NC	NC
C280-12	5444	4060	1000	261.0	205.4	II	NC	NC	NC
C280-16	6169	4600	900	278.0	192.6	III	T4C	NC	NC
C280-16	6169	4600	900	304.7	202.0	II	NC	NC	NC
C280-16	6598	4920	1000	307.0	197.9	II	NC	NC	NC
C280-16	6785	5060	900	312.0	197.0	III	T4C	NC	NC
C280-16	6785	5060	900	318.0	200.8	II	NC	NC	NC
C280-16	7268	5420	1000	340.0	199.7	II	NC	NC	NC

C280 fuel rate is at rated power, BSFC is at full power condition.
Custom package solutions available via DTO, contact your local dealer
for more information.

(continued)

C280 SERIES

AUXILIARY

Electronic Control System

(continued)

SPECIFICATIONS

In-line 6, In-line 8, Vee 12, Vee 16, 4-Stroke-Cycle Diesel			
Aspiration		TA	
Bore x Stroke		11.0 x 11.8 in	280 x 300 mm
Displacement	C280-6	6773 cu in	111 liter
	C280-8	9031 cu in	148 liter
	C280-12	13,546 cu in	222 liter
	C280-16	18,062 cu in	296 liter
Engine dry weight (approx)	C280-6	34,496 lb	15,680 kg
	C280-8	41,800 lb	19,000 kg
	C280-12	57,276 lb	25,980 kg
	C280-16	62,832 lb	28,500 kg

DIMENSIONS

		L	LE	H	WE
C280-6	min.	168 in/4276 mm	145 in/3691 mm	108 in/2733 mm	68 in/1722 mm
	max.	168 in/4276 mm	145 in/3691 mm	108 in/2733 mm	68 in/1722 mm
C280-8	min.	219 in/5561 mm	178 in/4511 mm	104 in/2641 mm	68 in/1722 mm
	max.	219 in/5561 mm	178 in/4511 mm	104 in/2641 mm	68 in/1722 mm
C280-12	min.	191 in/4861 mm	161 in/4087 mm	140 in/3550 mm	69 in/1741 mm
	max.	191 in/4861 mm	161 in/4087 mm	140 in/3550 mm	69 in/1741 mm
C280-16	min.	216 in/5482 mm	197 in/5007 mm	125 in/3171 mm	67 in/1704 mm
	max.	216 in/5482 mm	197 in/5007 mm	125 in/3171 mm	67 in/1704 mm

TOUGHER THAN EVER.

FOR GOVERNMENTAL & DEFENSE



Designed for Mission Readiness
Outstanding Power Density & Performance
Lower Signature
Best Servicability



THE NEW
C280 SERIES
POWER RANGE: 1.7 - 8 MW
DESTROYER | LPD | FRIGATE | OPV & CORVETTE

Cat Controls and Displays

Propulsion Control System

MPC100 – Propulsion Control System for Conventional Drive Systems

MPC100 is a new Propulsion Control System solution for both single and twin propeller applications. By providing redundant control capability it is integrating both primary and secondary (back-up) control ability of engine and marine transmission. Built in trolling valve control together with very flexible configuration allows MPC100 to be adopted to each installation as well as customized to high demands of each captain.

- Highly reliable with built in redundancy
- Simplified installation and configuration
- Safety and quality compliance (CE, USCG, ABYC, IACS)
- Supporting both 12 and 24 VDC powered applications
- Highly configurable for multiple powertrain configurations using Cat Electronic Technician (ET)
- Supporting all Cat electronically controlled propulsion engines from Cat C7.1 – C280.
- Compatible with all major marine transmissions
- Up to 8 command stations
- Built in control of the engine, transmission incl. trolling valve
- Mode selector incl. worm up, trolling, advanced trolling, slow vessel and cruising mode with possibility to adapt modes of operation

- Synchronization mode allowing user to operate twin propeller boats using single lever
- Optional back-up control capability
- Configurable shaft brake control
- Engine start interlocks



Displays

Cat Marine Displays (CMD)

The Cat Marine Display (CMD) provides the operator with easy-to-read, high resolution graphics to monitor all vessel operations. The configurable screen allows for full user customization and visual simplicity. All electronics are environmentally sealed for increased durability and safety and are built to perform reliably in extreme conditions.



The CMD is available with a 5", 8" or 13" screen size. While CMD5 offers more compact size and front and rear waterproof IP 66 rating, as well as appreciated tactile feel of the navigation keys.

New CMD8 and CMD13 Gen II displays offer appealing design and easy to use touch screen navigations. Additional features include multiple graphic skin options, configurable splash and monitoring screens, embedded manuals, Modbus, and IT camera support.

Propulsion, Auxiliary Engine and Genset Control Panels

Cat Control Panels provide complete propulsion engine and generator set control and monitoring from local and remote locations, including engine start/stop capability, alarm and protection, user and integration interfaces. System modularity allows expansion of remote monitoring, input/output capabilities and programmable relays.

Control Panels – Marine Propulsion Engines

C7.1 - C32

Remote Analogue Panel

For remote monitoring of engine basic parameters (available with C7.1 only).

MECP IB

The MECP IB is an inexpensive, basic control panel that can be mounted directly on the engine. For non MCS approved installations.

C9.3-3500 (C280)*

* See dealer for availability.

MECP II/LECP II

The MECP II/LECP II is MCS type-approved for manned and un-manned engine rooms. It provides local throttle control, a color display, advanced diagnostics, and integration possibilities. This Engine control panel is enhanced by built in connectivity solution allowing easy onboarding and access to variety of CUSTOMER VALUE AGREEMENTS (CVAs) offerings.

MECP IIIB/LECP III

The MECP IIIB has all the features of the MECP II and has additional I/O, supports more expansion modules, and has extra space for customer options. This engine control and integration panel is enhanced by built in connectivity solution allowing easy onboarding and access to variety of CUSTOMER VALUE AGREEMENTS (CVAs) offerings.

Control Panels – Marine Generator Set and Auxiliary Engines

C4.4 - C7.1

MGGP 200

(for electronically controlled engines only)

The MGGP 200 is a basic gauge panel providing basic instrumentation of engine parameters, as well as alarm indication and engine start/stop buttons.

MCS3

The MCS3 MCS type-approved panel provides generator and engine monitoring for manned and un-manned engine rooms. It includes MODbus and CANbus (J1939) interfaces (on electronically controlled engines only), AC monitoring, and optional load share control for multiple genset installations. Multi-position – left, right, rear, plus power – remote mountable.

C4.4 - C32

EMCP 4.2B

(for electronically controlled engines only)

The EMCP 4.2B non MCS type-approved panel provides generator and engine monitoring.

MGCP II

The MGCP II is MCS type-approved for manned and un-manned engine rooms. It provides local throttle control, a color display and advanced diagnostics and communications. This generator control and integration panel is enhanced by built in connectivity solution allowing easy onboarding and access to variety of CUSTOMER VALUE AGREEMENTS (CVAs) offerings.

C9.3 - 3500 (C280)*

** See dealer for availability.*

MGCP IIIB/LECP III

The MGCP II is MCS type-approved for manned and un-manned engine rooms. It provides local throttle control, a color display and advanced diagnostics and communications. This generator control and integration panel is enhanced by built in connectivity solution allowing easy onboarding and access to variety of CUSTOMER VALUE AGREEMENTS (CVAs) offerings.

L2

The L2 includes a CMPD as the main operator interface. It also has switches for engine protection override, prelube override, torque limit and manual speed control.

Accessories

RTD Module

The RTD Module monitors 8 RTD temperature sensors. It is generally used on a generator.

Thermocouple Module

The TC Module monitors 20 thermocouple temperature sensors. It is generally used on an engine.

Remote Panel 220E (MECP/MGCP II and III only)

The RP 220E can remotely monitor and start/stop two engines or gensets. Multiple RPs can be installed on a ship.

Remote Panel 410E (MECP/MGCP II and III only)

The RP 410E can remotely monitor and start/stop eight engines or gensets and four IP cameras. Multiple RPs can be installed on a ship.

Remote I/O 410 Module (MECP/MGCP II and III only)

The RIO 410 provides additional switch and sensor inputs for the control panel, as well as relay outputs. Up to four RIOs can be used with the IIIB panels, one with the II panels.

Relay Module (MECP/MGCP III only)

The ARM provides 14 programmable relays. It can be connected to the Local Control Panel or to an RP.

Power Analyzer Module (MGCP II and III only)

The PAM provides generator power information, such as phase voltage, current, power factor, Total Harmonic Distortion (THD), etc.

MSDU – Emergency Shutdown Module

Basic shutdown unit available as an option with C4.4 and C7.1 electronically controlled engine.

Cat Selective Catalytic Reduction (SCR)

A simple technical solution can help you meet today's stringent maritime emission standards.

The easy-to-install Cat SCR System is an exhaust gas aftertreatment solution compliant with U.S. Environmental Protection Agency (EPA) Tier 4 Final and International Maritime Organization (IMO) III emission standards. It is a sustainable solution to reduce NO_x emissions without sacrificing Caterpillar's marine engine efficiency, as well as maintain the durability and reliability that our customers expect. Regional initiatives from environmentally friendly governments are already in effect with incentives benefitting ship owners who invest in NO_x emissions reduction technology. Caterpillar has evaluated multiple solutions, and the conclusion has been that SCR is the optimal solution to meet U.S. EPA Tier 4 and IMO III requirements. SCR allows for the lowest total cost of ownership when compared to other solutions, such as EGR.

Features and Benefits

- Designed for NO_x emissions reduction. Meets IMO III, U.S. EPA Tier 4 Final, and EU Stage V emission standards.
- Compact package and flexible mounting configurations
- A fully integrated and certified solution, all available from the engine OEM
- Available for new vessel construction and retrofit/repower projects
- Easy to install with minimum impact to vessel design
- Common control and monitoring system for reliable and safe operation
- Global dealer network for installation and service in any location

Clean Emission Module (CEM)

Caterpillar designed the SCR System for Cat marine applications with a compact and easy to install Clean Emission Module (CEM). You will benefit from an optimally matched system with minimum impact to vessel design. Thus, we offer several different CEM configurations to suit all markets and vessel types.



Cat C7.1 and C9.3 CEM Airless,
IMO II/III switchable



Cat C18 double CEM with Y-Pipe
Airless, IMO II/III switchable



Cat C18 CEM Airless,
EU Stage V with DPF




Cat 3500 series CEM Air-Assist, U.S. EPA Tier 4, IMO II/III
switchable U-Flow or Z-Flow configured




Cat C280 CEM Air-Assist,
U.S. EPA Tier 4 and IMO II/III
switchable vertical stack



Cat C32/3512 series
EU Stage V, DPF



Cat C18 and C32 CEM Air-Assist, U.S. EPA Tier 4 and IMO III
U-Flow or Z-Flow configured

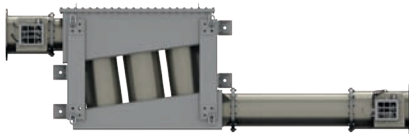

Examples: Dosing cabinet



Contact your local dealer for more information.

All pictures shown are for illustration purpose only. Product may vary due to product enhancement.

Engine Upgrades

Keep your engines shipshape to meet environmental standards – and your own. Engine upgrades protect your investment and your bottom line.

Available for select models, engine upgrades may be completed dockside or on the water to minimize downtime. Count on them to promote efficiency, performance, safety, and reduced emissions for navigating even the most challenging circumstances.

Emission Upgrades

Emission Upgrades currently available for select Cat® 3500, 3600, and C280 engines. Upgrade to the Latest Emissions Technology available for your engines.

- Select Cat 3600 and C280 engine models can be upgraded to an available lower emitting U.S. EPA certified configuration, up to and including IMO II and U.S. EPA Tier 2; IMO III, U.S. EPA Tier 4.
- Select Cat 3500 engine models can be upgraded to an available lower emitting U.S. EPA certified configuration, up to and including U.S. EPA Tier 2, U.S. EPA Tier 3, IMO II, and IMO III.

Performance Upgrades

Performance upgrades currently available on select 3500 and 3600 engines include genuine Cat parts bringing the customer's engines performance in line with current standards.

The upgrade includes proven Cat parts to convert from a mechanical to an electronic fuel injection system, saving fuel and improving load acceptance and acceleration. Performance Upgrades also can reduce vibration and noise.

Contact your local dealer for more information.




Watch this video!

Customer Value Agreements

FUEL FILTER



THERMOSTAT



MAINTENANCE MADE EASY.

Staying on top of planned maintenance keeps your Cat® Marine engine — and your vessel — running at optimal performance. Here's an easy way to ensure you have exactly what you need, right when you need it, for key service intervals: Keep a Cat Marine Engine Planned Maintenance Kit on board.

**Specific kit parts vary based on model and kit selected

O-RING




SEA WATER
PUMP IMPELLER



Cooling System & Filter Kits for C1.5, C2.2, C4.4, and C7.1 Engines


AIR FILTER

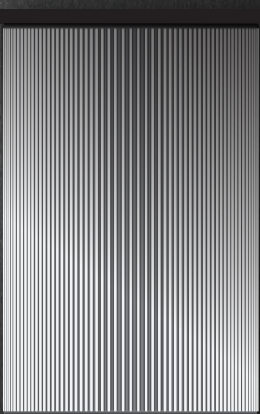

ALTERNATOR BELT



SCAN FOR MORE INFORMATION

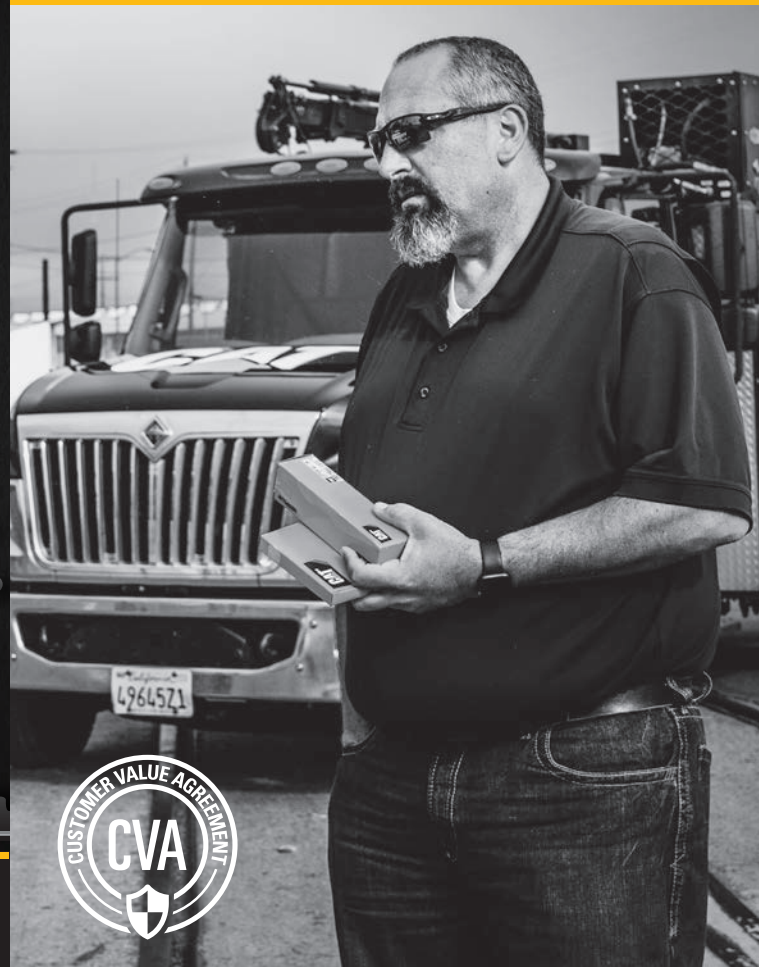

Marine CVAs

Confidence on Board

Why invest in a Customer Value Agreement (CVA)?

Caterpillar Marine can help you drive key business outcomes, such as achieving the lowest Total Cost of Ownership (TCO), optimizing the lifecycle of your engine and a lot more, with a customized CVA.

You likely have set expectations about the performance and lifecycle of your Marine assets and a recipe for meeting them. CVAs from your Cat® dealer provide you with exceptional structure, solutions and services for even better results.

Anchored in the security of Genuine Cat Parts and expert dealer support, CVAs ensure that all stakeholders – owners, operators, technicians – are informed of maintenance and repair needs, risks and any associated costs today and in the future to help you increase productivity and enhance your ownership experience.

With a Marine CVA, you structure the services you need to create the outcomes you want, including:

- **Self-service planned maintenance (PM) kits** enable a convenient, cost-effective solution that supports the lowest TCO.
- **Dealer-led repair options**, coupled with demand planning, help mitigate the risk of last-minute major repairs.
- **Data-driven insights** through digital solutions like Cat Remote Fleet Vision (RFV) identify capacity or uptime opportunities.



- **Financing or extended service coverage (ESC) options** help you manage your cash flow and mitigate unexpected costs.
- **Engine upgrades and other services** help you minimize fuel usage, decrease your engine's environmental impact, lower TCO and meet emissions standards. Regardless of where you are in your energy transition, services from Caterpillar can provide visibility to your emissions and drive reductions through emissions assessments.

Contact your Cat dealer for more information about how a Marine CVA can help you achieve key outcomes. Whether you choose self-service or dealer-supported options, or select services direct from Caterpillar, you can tailor your CVAs to support newly delivered, mid-life or end-of-life engines for the solution that works best for you!



CAT[®] C7.1

EU STAGE V* • U.S. EPA Tier 3
CHINA STAGE II

FLEXIBILITY TO NAVIGATE NEW WATERS

C7.1 Marine Auxiliary Engine

109 bkW – 164 bkW @1500 rpm

129 bkW – 218 bkW @1800 rpm

C7.1 Marine Generator Set

100 ekW – 150 ekW @1500 rpm

118 ekW – 200 ekW @1800 rpm

C7.1 Marine Variable Speed

Auxiliary Engine

129 bkW – 149 bkW – 186 bkW

(600 – 2400 rpm)



Watch the Video



EMD Medium-Speed Diesel and Dual Fuel Solutions



* Refer to product pages for more detail.


EMD Propulsion and Dual Fuel Engines

EMD E 23 & E 23B (710 Series) Marine Propulsion and Generator Set Engines

EMD Engines have been in the marine propulsion business since 1935. EMD brings two-cycle medium-speed engines to the Caterpillar Marine family, with over 78,000 engines delivered globally, making it one of the largest medium-speed engine families in operation around the world.

Built on the successful 710 Series, the current EMD product line consists of medium-speed two-cycle diesel and dual fuel engines models ranging in power, from 1,490 to 4,100 kW.

The E 23 (IMO II/U.S. EPA Tier 3) and E 23B (IMO III/ U.S. EPA Tier 4 Final) are available in 8, 12, 16 and 20 cylinder configurations with continuous power ratings from 1249 bkW (1675 hp) to 3729 bkW (5000 hp).

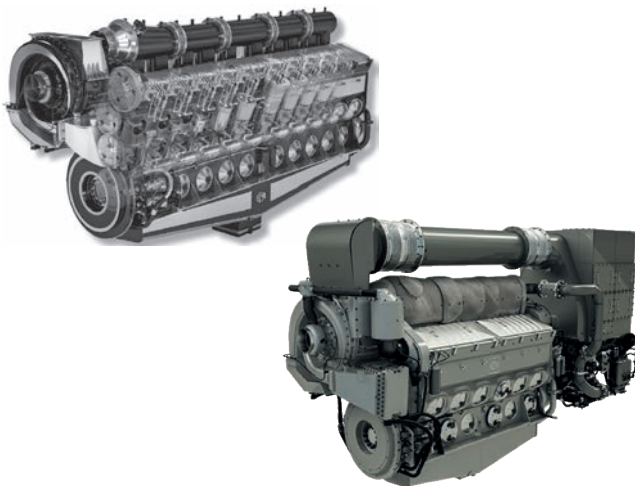

E 23B Specifications

- IMO III emissions compliant
- U.S. EPA Tier 4 Final certified
- 200 rpm minimum idle speed
- 900 rpm maximum rated speed
- 230 mm bore x 279 mm stroke
- Welded 710 Series “G” Crankcase
- Turbocharged-aftercooled aspiration
- Electronically governed
- Available as clockwise or counterclockwise rotation
- Engine diagnostics and general alarm
- Programmable parameters

The EMD E 23 Series offers the following features:

Performance Advantage

- Performance of a high-speed engine, with the durability advantage of a medium-speed engine
- Best in-class transient response. Idle to full power in 10 seconds in fixed pitch propeller applications
- 200 rpm low idle speed improves fuel efficiency and operating range flexibility

Total Cost of Ownership Advantage

- 30,000 hour or greater overhaul interval with no midlife top end overhaul or oil change required
- Easy, non-invasive inspection of cylinder power assembly component for simple predictive maintenance
- Global dealer network for consistent service


Emission Advantage

- Integrated SCR to optimize NO_x reduction, fuel efficiency, and compact footprint
- Closed crankcase ventilation system and valve stem seals for additional PM reduction
- IMO III compliant and U.S. EPA Marine Tier 4 Final certified


Selective Catalytic Reduction (SCR) System

The EMD SCR system is co-designed by EMD and Caterpillar. The EMD SCR System has been developed especially for the EMD two cycle medium-speed engines to meet IMO III and U.S. EPA Tier 4 Final emission standards. Every component in the EMD SCR System is designed and manufactured to EMD product standards with highest quality.

EMD E23B Model Standard SCR Configuration:

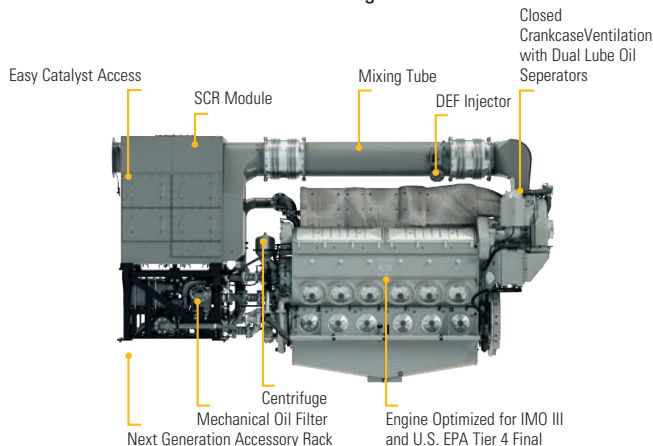

EMD E23B Model Remotely Mounted SCR Configuration:

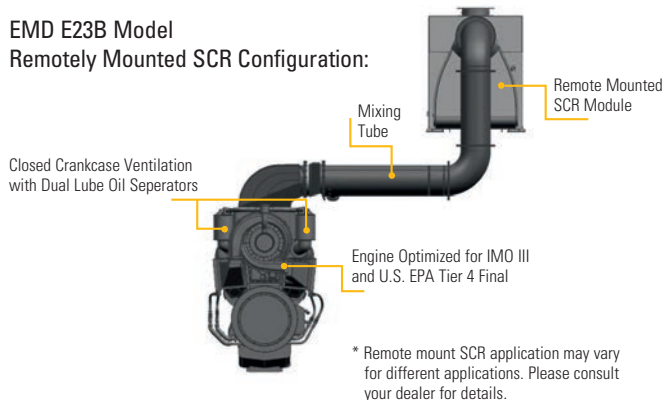

Biodiesel, Renewable Diesel and other Alternate Fuels

Progress Rail is committed to providing sustainable solutions for our new and existing customers. Biodiesel and Renewable Diesel (HVO, HDRD) are two fuels that provide great advantages for greenhouse gas (GHG) emission reduction for the use of lower-carbon intensity fuels today. EMD is committed to the operation and reliability of these fuels in the EMD engines – providing our customers economical and durable ways to reduce GHGs. EMD currently approves the usage of up to 20% Biodiesel blend (B20) and is testing additional blends of Biodiesel and Renewable Diesel fuel in many applications.

EMD has developments in progress in other areas of alternate fuels. This includes work on Methanol and Natural Gas, with a focus on assisting our customers' decarbonization efforts.

Consult your EMD Power Products Distributor or visit

https://www.progressrail.com/en/Segments/Engines/Marine_Stationary_Engines.html

for more information regarding Medium Speed Engines, Dual Fuel Solutions, Biodiesel and Renewable Diesel Fuels.

DIMENSIONS (mm) AND WEIGHTS (kg)


Type	A	B	C	D	E	F	G	H	Engine Weight	Acc. Rack Weights
8 E 23	3246	2573	479	2790	2134	1864	6202	929	13018	1723
12 E 23	3410	2764	632	2948	2240	2734	7178	1050	17690	1723
16 E 23	3410	2764	632	2948	2240	3715	8171	1050	20865	1723
20 E 23	3642	2966	835	3150	2240	4559	9015	1050	23949	1769

DIMENSIONS (in) AND WEIGHTS (lb)


Type	A	B	C	D	E	F	G	H	Engine Weight	Acc. Rack Weights
8 E 23	127.8	101.3	18.9	109.9	84.0	73.4	244.2	36.6	28,700	3,799
12 E 23	134.3	108.8	24.9	116.1	88.2	107.6	282.6	41.3	39,000	3,799
16 E 23	134.3	108.8	24.9	116.1	88.2	146.3	321.7	41.3	45,999	3,799
20 E 23	143.4	116.8	32.9	124.0	88.2	179.5	354.9	41.3	52,799	3,900

Model	Cylinders	Rating	bkW	bhp	rpm	g/bkW-hr	IMO	U.S. g/h	EPA
8 E 23	8	CS	1491	2000	900	201	II	93	T3
12 E 23	12	CS	2237	3000	900	198	II	138	T3
16 E 23	16	CS	2983	4000	900	196	II	182	T3
20 E 23	20	CS	3729	5000	900	209	II	236	T3
8 E 23	8	INT	1641	2200	900	200	II	103	T3
12 E 23	12	INT	2461	3300	900	197	II	152	T3
16 E 23	16	INT	3281	4400	900	195	II	201	T3
20 E 23	20	INT	4101	5500	900	210	II	261	T3

Note: EMD E 23 engines were formerly EMD 710 Series. INT equals Intermittent Service Rating. CS equals Continuous Service Rating. 750 rpm (50 Hz) and dual fuel options are available. Contact local dealer for detail.

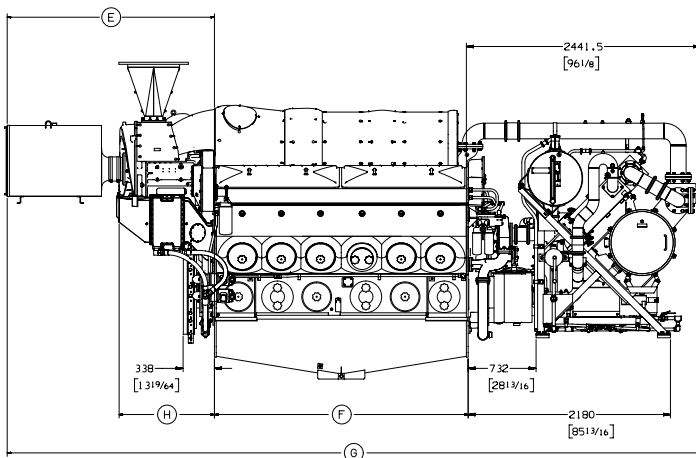

(shown with accessory rack, exhaust outlet adapter and EMD supplied air filter)

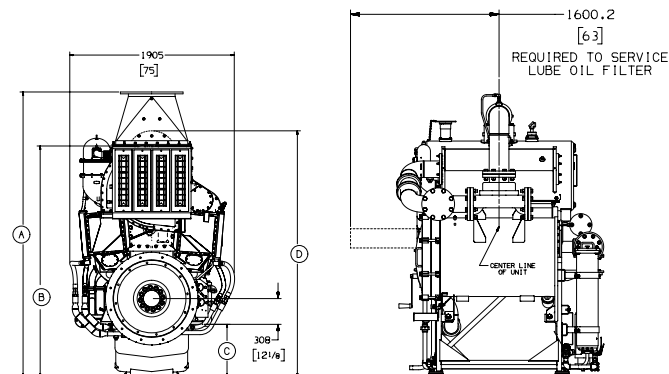

(shown with accessory rack)

E 23B



DIMENSIONS (mm) AND WEIGHTS (kg)

Type	A	B	C	D	E	F	G	H	Engine Weight	Acc. Rack Weight
8 E 23B	3533	2573	479	2740	2034	1864	5572	1038	14808	3562
12 E 23B	3685	2764	632	2836	2034	2734	6591	1143	19608	3562
16 E 23B	3685	2764	632	2836	2034	3715	7548	1143	21339	3904

DIMENSIONS (in) AND WEIGHTS (lb)

Type	A	B	C	D	E	F	G	H	Engine Weight	Acc. Rack Weight
8 E 23B	139.1	101.3	18.9	107.9	80.1	73.4	219.4	40.9	32646	7853
12 E 23B	145.1	108.8	24.9	111.7	80.1	107.6	259.5	45.0	43228	7853
16 E 23B	145.1	108.8	24.9	111.7	80.1	146.3	297.2	45.0	47044	8607

Note: Completely Integrated System

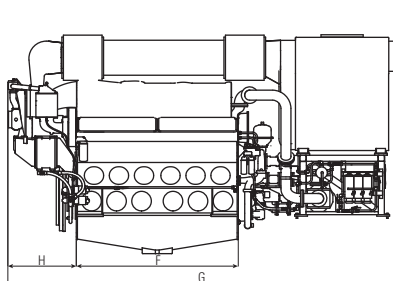

TECHNICAL DATA

Model	Cylinders	Rating	bkW	bhp	rpm	IMO	EPA	EU
8 E 23B	8	CS	1491	2000	900	III	T4F	NC
12 E 23B	12	CS	2237	3000	900	III	T4F	NC
16 E 23B	16	CS	2983	4000	900	III	T4F	NC
20 E 23B*	20	CS	3729	5000	900	III	T4F	NC
8 E 23B	8	INT	1641	2200	900	III	T4F	NC
12 E 23B	12	INT	2461	3300	900	III	T4F	NC
16 E 23B	16	INT	3281	4400	900	III	T4F	NC
20 E 23B*	20	INT	4101	5500	900	III	T4F	NC

Note: INT equals Intermittent rating

* Contact your local dealer for details

E 23B Enhancements:

- IMO III and U.S. EPA Tier 4 Final
- Completely integrated SCR System – no need to worry about mounting or where to place it in the engine room
- Closed Crankcase
- High pressure lube oil system
- Mechanical oil filtration with centrifuge
- Next generation Accessory Rack

Standard Equipment

- EMDEC/CAT ADEM Engine control module, including EUI injectors, wiring harness and sensors.
- Fuel pump, duplex spin-on primary filters/bypass, and manual priming pump.
- Single oil pump, cooler, strainer, centrifuge, self-cleaning filter, turbocharger primary and soakback filter
- Gear-driven HT and LT centrifugal coolant pumps and automatic thermostatic valves
- Single-stage scavenging air turbocharger with two (2) aftercoolers.
- Individual cylinder exhaust thermocouples and exhaust manifold thermal blankets (SOLAS)
- SCR Module, DEF dosing cabinet, DEF mixing tube, and flex connections
- Air start system

Options

- Marine society certifications
- Alarm & Protection panels and remote displays
- Power takeoff (free end).
- Main bearing thermocouples
- Vibration isolation mounts
- Torsional Vibration Analysis.
- Custom color finish paint (cement gray standard).
- Engine-driven sea water pump
- Oil mist detection
- Water expansion tanks (HT & LT)
- Close-coupled intake air filter

Rating Definitions and Conditions

Continuous Service Rating is suitable for continuous duty applications with no limit on operating hours at maximum load.

Intermittent Rating is suitable for continuous duty applications involving varying loads. Maximum engine power produced is limited by application guidelines, leaving a power reserve for intermittent operating conditions. Operating time at loads above the Continuous Service Rating is limited to one hour in 12 or 8% of total operating hours.

GLOSSARY



Emissions Standards

U.S. Environmental Protection Agency (EPA), Transport Canada, China Ministry of the Environment and the European Union have enacted programs to reduce emissions from all domestic diesel vessels. International vessels are subject to the requirements of the country where the vessel is registered (flagged) and if regulated, typically follow the requirements of the International Maritime Organization (IMO). Caterpillar Marine has a key focus on emissions regulations to ensure that our marine engines meet global requirements. We've long been a leader in solving environmental challenges, allowing customers to focus on business progress.

U.S. EPA Standards

U.S. EPA applies for marine diesel engines installed in a variety of U.S. flagged recreational and workboat vessels.

High Performance Applications:

EPA Tier 3: Cat C7.1, C18 & C32

Commercial Applications:

EPA Tier 3: Cat C1.5, C2.2, C4.4, C7.1, C9.3, C15, C18, C32 (< 600 kW)

EPA Tier 4: Cat C32, 3500, C280 (> 600 kW)

U.S. EPA Regulations

- NC** Not U.S. EPA Marine Certified for use in the U.S. or Canada.
- T3C** Meets U.S. EPA Marine Tier 3 Commercial standards.
- T3R** Meets U.S. EPA Marine Tier 3 Recreational standards.
- T3CR** Meets U.S. EPA Marine Tier 3 Commercial standards and U.S. EPA Marine Tier 3 Recreational standards.
- T4C** Meets U.S. EPA Marine Tier 4 Final Commercial standards.
- Emergency** Meets U.S. EPA Marine Tier 2 or Tier 3, as applicable, that otherwise must meet Tier 4 Final.

Canada Regulations

As of January 1, 2016, Category 2 engines (7 to 30 L/cylinder) on Canadian flagged vessels must meet U.S. EPA requirements or have an equivalent certificate that has been provided by another country. Unless otherwise exempted, all other marine engines must meet IMO requirements for vessels constructed after January 1, 2016 (IMO III). Engines on vessels with keel laid in 2017 with combined propulsion power < 750 kW must meet IMO II and are exempt from IMO III: the IMO III exemption is subject to review by December 31, 2022.

China Regulations

China Domestic Marine regulation (GB15097) China Stage II went into effect after July 1, 2022. International vessels subject to the requirements of IMO and are not subject to China Domestic Marine regulations.

Engine Certification Descriptions

- C-II** Engines meeting China inland water regulations.

IMO Certification

The International Maritime Organization (IMO) regulates exhaust gas emissions on diesel engines > 130 kW. Since January 1, 2011 the IMO has regulated NO_x exhaust emission to their prescribed IMO II levels except for special emissions control areas or (ECA's). There are four NO_x emission control areas that are currently regulated by IMO to stage III. These include the North American ECA, U.S. Caribbean ECA, North Sea ECA, and the Baltic Sea ECA. Vessels that operate within these ECA's must be compliant with IMO III. Engines that are used for emergency power are not subject to IMO regulations.

EU Certification

Commercial Craft Directive 2016/1628 (EU Stage V)

This directive is in effect and applies to all propulsion and auxiliary engines. Caterpillar has certified some engines with a rated power of greater than 560 bkW to this standard. Most of these are to be used for inland waterway vessels. These engines also became effective by reciprocity agreement with CCNR Stage II, on July 1, 2007. (97/68 directive was repealed January 1, 2017 although 97/68 (IIIA) standards apply to marine engines until Stage V came into effect January 1, 2019 for < 300 kW and January 1, 2020 for ≥ 300 kW and all references to 97/68 are now references to EU 2016/1628 (Stage V)).

Engine Certification Descriptions

- IW** Meets EU Directive 2016/1629 Technical Requirements for Inland Waterway.
- NC** Not Certified for specific regulations.
- NST** Engines ≤ 19 kW are not subject to EU Directive 2016/1629.
- RCD** Recreational Craft Directive, meets 2013/53/EU.
This directive is in effect and applies to all recreational engines used in the European Union areas.
- EUV** Engines meeting Stage V.

Marine Rating Definition

Propulsion Engines

Rating definitions provide guidelines to help determine the appropriate rating for specific applications based on vessel operation. Cat marine propulsion engine rating applications for C9 through 3516E are based on load factor, time at full throttle, and operational hours per year.

Contact your local Cat dealer for assistance in determining the appropriate rating for your specific application.

A Rating (Unrestricted Continuous)

Typical applications: For vessels operating at rated load and rated speed up to 100% of the time without interruption or load cycling (80% to 100% load factor).

Typical operation ranges from 5000 to 8000 hours per year.

For C280-6, C280-8, C280-12 and C280-16

Engines Only:

Continuous Service (CS) Rating is suitable for continuous duty applications, including dredges, for operation without interruption or load cycling.

B Rating (Heavy Duty)

Typical applications: For vessels operating at rated load and rated speed up to 80% of the time with some load cycling (40% to 80% load factor).

Typical operation ranges from 3000 to 5000 hours per year.

C Rating (Maximum Continuous)

Typical applications: For vessels operating at rated load and rated speed up to 50% of the time with cyclical load and speed (20% to 80% load factor).

Typical operation ranges from 2000 to 4000 hours per year.

For C280-6, C280-8, C280-12, C280-16, and EMD E 23 Engines Only:

Maximum Continuous (MC) Rating or EMD Intermittent rating is generally used for vessel applications involving varying loads. The engine power actually produced is limited by application guidelines, leaving a power reserve for unusual operating conditions. Operating time at loads above the Continuous Service Rating for a given rpm is limited to one hour in 12 or 8.3% of total operating hours.

FCVR – Fast Commercial Vessel Rating: 85% of operating hours at rated speed, 15% of hours at less than 50% rated power. TBO approximately 20,000 - 25,000 hours. The propulsion system design should consider heavy ship condition, sea state, hull fouling and propulsion system power losses for proper match between engine and prop/jet.

D Rating (Intermittent Duty)

Typical applications: For vessels operating at rated load and rated speed up to 16% of the time (up to 50% load factor).

Typical operating ranges from 1000 to 3000 hours per year.

E Rating (High Performance)

Typical applications: For vessels operating at rated load and rated speed up to 8% of the time (up to 30% load factor).

Typical operation ranges from 250 to 1000 hours per year.

DEP Ratings (Diesel Electric Propulsion, Electric Drive)

Typical applications: For vessels operating with generator sets that provide power to the propulsion systems. All ratings are Prime Ratings according to ISO 8528-1 for unlimited usage per year at a load factor of $\leq 70\%$. 10% overload capability is required for a maximum of 1 hour out of every 12 and a maximum of 25 hours total per year.

Typical applications could include but are not limited to supply vessels, cruise vessels, research vessels, or any other ship using diesel electric drive systems.

Rating Conditions for 3500s and Smaller Engines

Ratings are based on SAE J1228 standard conditions of 29.61 in Hg (100 kPa) and 77° F (25° C). These ratings also apply at ISO3046-1:2002E, ISO8665, DIN6271-3, and BS5514 conditions of 29.61 in Hg (100 kPa), 81° F (27° C) and 60% relative humidity.

Caterpillar maintains ISO9001:2000 certified quality management systems for engine test facilities to assure accurate calibration of test equipment. Electronically controlled engines are set at the factory at the advertised power corrected to standard ambient conditions. The published fuel consumption rates are in accordance with ISO3046-1:2002E.

Fuel consumption is based on SAE J1995 with +/- 3% tolerance at rated power for fuel having an LHV of 18,390 Btu/lb (42,780 kJ/kg) when used at 84.2° F (29° C) and weighing 7.001 lb/U.S. gal (838.9 g/L). Additional ratings may be available for specific customer requirements. Consult your Cat representative for details.

Rating Conditions for C280 Engines

Ratings are based on SAE J1349 standard conditions of 29.61 in Hg (100 kPa) and 77° F (25° C). These ratings also apply at ISO3046-1:2002E, ISO8665, DIN6271-3, and BS5514 standard reference conditions. Ratings also meet classification society maximum temperature requirements of 113° F (45° C) temperature to turbo and 90° F (32° C) seawater temperature without derate.

Fuel consumption is based on ISO3046/1 with +5% tolerance at rated power for fuel having an LHV of 18,390 Btu/lb (42,780 kJ/kg) and weighing 7.001 lbs/U.S. gal (838.9 gal/liter). Includes engine mounted fresh water and lube oil pumps. BSFC without pumps, 2% less. Additional ratings may be available for specific customer requirements. Consult your Cat representative for details.

Performance Data

Performance along a typical fixed pitch propeller curve with a 3.0 exponent.

Power rated in accordance with NMMA procedure as crankshaft power. For units equipped with Caterpillar supplied marine gears, reduce crankshaft power by 3% for propeller shaft power.

Marine Rating Definition Generator Sets and Auxiliary Engines

Caterpillar has offered packaged power systems for over 70 years. We assure power and performance ratings, as advertised, through extensive factory testing.

Cat generator sets typically exceed NEMA and IEEE standards for load acceptance. All rotor designs have been type tested at 150% overspeed for two hours at 338° F (170° C) ambient temperature.

Rating Definition

All Cat marine auxiliary engines and generator sets are rated for prime power for continuous electric service according to ISO 8528-1.

Hours per Year	Unlimited
Load Factor	< 70%
Overload Capacity	+ 10%
	maximum of 1 hour in 12
	maximum of 25 hours per year

Rating Conditions

Ratings are based on SAE J3046 and J1349 standard conditions of 29.61 inHg (100 kPa) and 77° F (25° C). These ratings also apply at ISO8665, ISO3046-1:2002E, DIN6271-3, and BS5514 standard conditions of 29.61 in. Hg (100 kPa), 81° F (27° C), and 60% relative humidity.

Fuel rates are based on fuel oil of 35° API [60° F (16° C)] gravity having an LHV of 18,390 Btu/lb (42 780 kJ/kg) when used at 85° F (29° C) and weighing 7.001 lbs/U.S. gal. (838.9 gal/L).

Marine Auxiliary Engines are mainly used as generator set engines; however, they can be used for electrically driven pumps, winches, conveyors, thrusters, when it is specified. Engines can be radiator cooled or heat exchanger/keel cooled.

Abbreviations

bhp	Brake Horsepower	MCS	Marine Control System
bkW	Brake Kilowatts	mhp	Metric Horsepower
CEM	Clean Emission Module	NA	Naturally Aspirated
DEF	Diesel Exhaust Fluid	R	Radiator Cooled
DIN	German Standards Organization	SAE	Society of Automotive Engineers
DF	Dual Fuel	SCAC	Separate Circuit Aftercooled
ekW	Electrical Kilowatts	SCR	Selective Catalytic Reduction
EPA	Environmental Protection Agency	T	Turbocharged
EU	European Union	TA	Turbocharged, Aftercooled
EUI	Electronic Unit Injection	TSA	Turbocharged, Supercharged, Aftercooled
g/bkWh	Grams per Brake Kilowatt Hour	TTA	Twin Turbo Aftercooled
H	Height of Engine	U.S. gal/h	U.S. Gallons per Hour
HE	Heat Exchanger Cooled	W	Overall Width
IMO	International Maritime Organization	WE	Width of Engine
ISO	International Standards Organization		
kVA	Kilovolt-Ampere		
L	Overall Engine Length		
LE	Length of Engine from Front of Engine to Rear Face of Flywheel Housing		
LG	Length of Engine with Gear/Generator		

Global Dealer Network

Caterpillar’s global dealer network has broad capabilities and has a strong global presence, ensuring customer access to complete solutions for your equipment needs. From people at the local branch to those at the corporate level – we offer global support at the local level. Service locations offer dealer personnel who know and understand their local market, their customers, and their customers’ businesses.

Cat dealer field service capability is second to none. Your uptime is maximized with the fastest response time available, and qualified, experienced field service technicians with the expertise and equipment to quickly diagnose and fix problems. Our technicians know Cat products and solutions, and deliver the same world-class support to you – wherever and whenever you need it.



To find your nearest dealer, please visit:
https://www.cat.com/en_US/support/dealer-locator.



HEADQUARTERS

Caterpillar Marine

10203 Sam Houston Park Dr
Houston, TX 77064/USA

EUROPE, AFRICA, MIDDLE EAST

Caterpillar Marine

Große Elstraße 279 a
22767 Hamburg/Germany

Caterpillar Marine Power UK Ltd.

22 Cobham Road
Wimborne
Dorset
BH21 7 PW
United Kingdom

ASIA-PACIFIC


**Caterpillar Marine Trading
(Shanghai) Co., Ltd**

19/F, Caterpillar Marine Center
1319, Yan'an West Road
200050 Shanghai/P.R. China

**Caterpillar Marine Asia Pacific
Pte Ltd**

No. 5 Tukang Innovation Grove
Singapore 618304
Republic of Singapore

For more information
please visit:
www.cat.com/marine

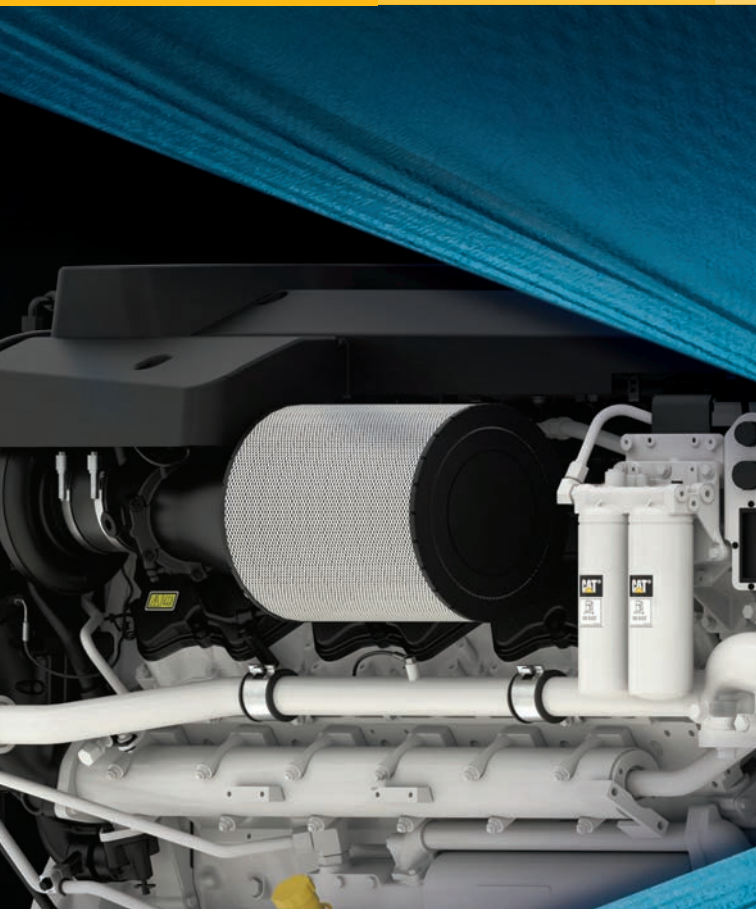

CATERPILLAR®

© 2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

LEDM3457-29